


FLOOD LIGHT

PQ-FLCR

- High pressure die-cast housing, anti-static powder coating
- High thermal conductive material and high efficiency
- Highly efficient LED chip ensures excellent performance
- Photocell, emergency backup, trunnion, knuckle and slip fitter as option

APPLICATIONS

- Used for general and security lighting for large area, building façades, signs and landscapes.

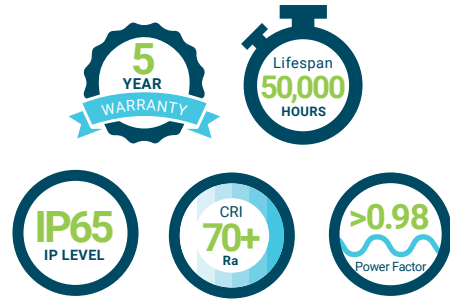

SPECIFICATIONS

| | | | |
|-----------------------|---------------------------|---------------------|---|
| Input Voltage | AC 120V, 200-240V or 347V | Working Temperature | -40°C ~ +40°C |
| THD | <15% | IP Rating | IP65 |
| Color Temperature | 2700K-6500K | Lifespan | 50000 h |
| Color Rendering Index | >70 | Installation | Knuckle, Trunnion, Slip Fitter, Photocell, Emergency Backup |
| Warranty | 5 years | Power factor | >0.98 |

| MODEL | POWER (W) | LUMINOUS FLUX |
|--------------|-----------|---------------|
| PQ-FLCR-10W | 10 | 1220 lm |
| PQ-FLCR-18W | 18 | 2250 lm |
| PQ-FLCR-30W | 30 | 3650 lm |
| PQ-FLCR-50W | 50 | 6150 lm |
| PQ-FLCR-80W | 80 | 10000 lm |
| PQ-FLCR-100W | 100 | 12550 lm |
| PQ-FLCR-120W | 120 | 15000 lm |
| PQ-FLCR-140W | 140 | 18200 lm |




LISTINGS



FLOOD LIGHT


PQ-FLCR

LIGHT DISTRIBUTION

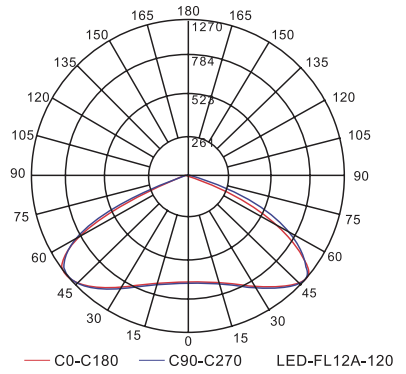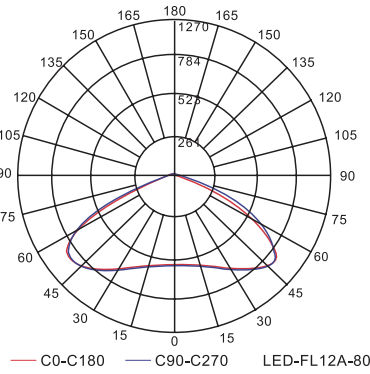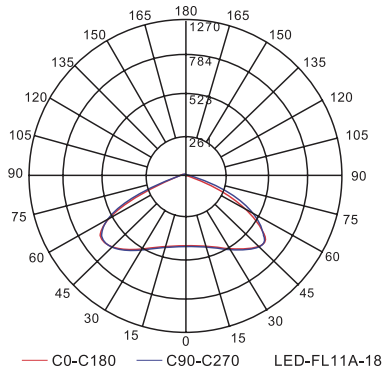


DIMENSIONS (inch)


PQ-FLCR-10W, PQ-FLCR-18W

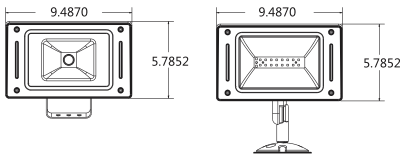

PQ-FLCR-30W, PQ-FLCR-50W, PQ-FLCR-80W

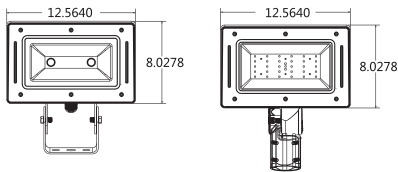

PQ-FLCR-100W, PQ-FLCR-120W, PQ-FLCR-140W

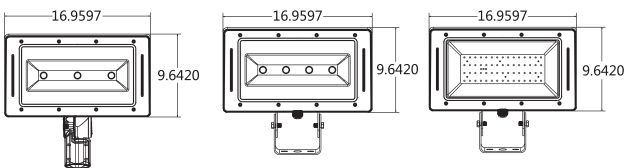

MOUNTING OPTIONS



Knuckle



Trunnion



Slip Fitter

