

DOWNLIGHT WITH EXTERNAL DRIVER BOX

PQ-DWSQB-004P

- Air tight & Type IC rated: no housing required.
- Fast & easy Installation saves labor cost.
- Junction box Included:
No additional hardware required.
- CRI 90: True color rendering is an option.
- Square shape: elegant design.
- ETL-listed: reliable quality and safe operation.
- Suitable for damp locations.



LISTINGS




SPECIFICATIONS

Input Voltage	120V AC, 50/60HZ	Beam Angle	110°
Input Power	12W	Color Temperature	2700K-6000K
Lumen	850LM	Dimension	128*128*36mm
Halogen Equivalent	90W	Cutout Size	105*105mm
Efficiency	70LM/W	Dimming	Triac dimming 10-100%
CRI	>82Ra (CRI 90 for option)	Approved Locations	Insulated ceilings
Power Factor	0.95	Air Tight	Yes
LED Chip	26pcs SMD2835 (0.5W/pc)	Lamp Life	70% light output at 50000hrs
Warranty	5 years	Certification	ETL , cETL, Energy Star


DOWNLIGHT WITH EXTERNAL DRIVER BOX

PQ-DWLS-004P

DIMENSIONS

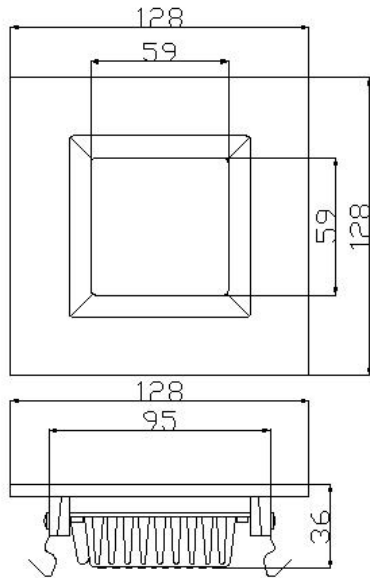

LIGHT DISTRIBUTION

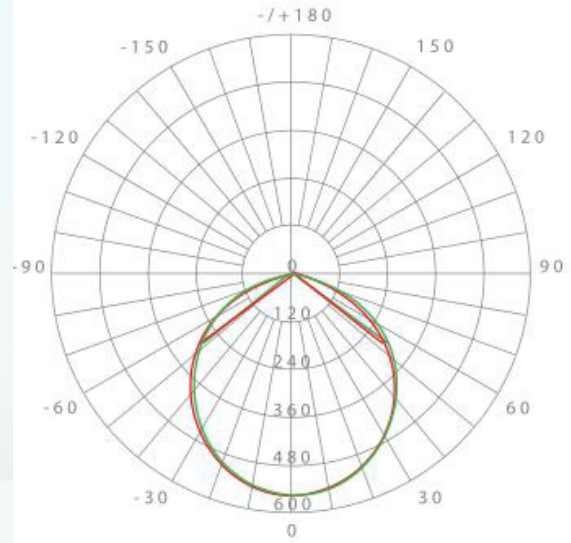

FEATURES AND BENEFITS

- **Appearance:** Patented design, with unique appearance, attractive for marketing.
- **Body:** Durable, diecast aluminum alloy for optimal heat dissipation .
- **Paint:** White, nickel or black, scratch resistant and smooth finish
- **LEDs:** 26pcs LM80 San'an 2835 LED (0.5W/pc), which guarantee high lumen and high quality
- **Driver:** Isolated LED driver with 5 years warranty.
- **Junction Box:** Included, install directly in Insulated Ceilings (IC) without any thermal housing.

TRIM COLORS AVAILABLE



White

Black

Brushed Nickel