

# WATERPROOF

## PQ-WPL4

- Quick-mount, surface, stainless steel spring clips supplied
- Diffuse polycarbonate lens for low glare and maximum protection
- Built-in sensor, external sensor is optional
- Emergency battery backup available
- Works in -35°C to 40°C temperature range
- Ideal for car washes, tunnels, stairwells



MODEL	LED POWER (W)	DIMENSIONS (mm)
PQ-WPL4-051K-046W	46	1160 x 120 x 109
PQ-WPL4-051K-150W	150	1270 x 254 x 115
PQ-WPL4-CCTK-046TW	30 / 38 / 46	1160 x 120 x 109
PQ-WPL4-CCTK-060TW	15 / 30 / 45 / 60	
PQ-WPL4-CCTK-135TW	100 / 120 / 135	1270 x 254 x 115
PQ-WPL4-CCTK-200TW	150 / 175 / 200	

### SPECIFICATIONS

Input voltage	100-347VAC	IP and IK Ratings	IP66 / IK10
Color temperature (051K)	5000K	Dimming	0-10V
Color temperature (CCTK)	3500K, 4000K, 5000K	Ambient temperature	-35 °C to 40 °C
Luminous Efficiency	130 lm /W - 150 lm/W	Power factor	> 0.9
CRI	80	Environment	Wet location listed
Lifespan	50000 h	Warranty	5 years limited
Housing and Lens	Polycarbonate	Humidity	20%-85% RH, non condensing


### CERTIFICATIONS



# WATERPROOF

PQ-WPL4

## DIMENSIONS (46W, 60W)

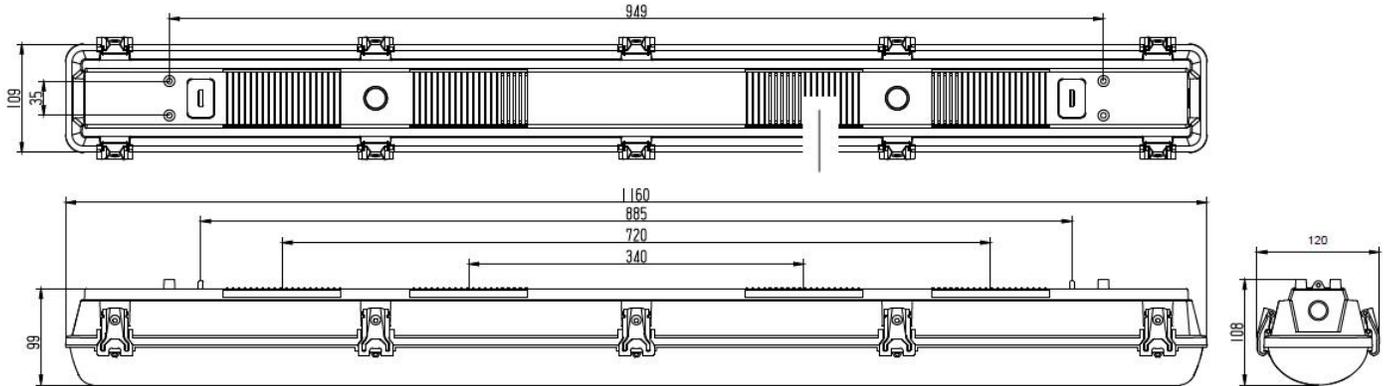

## MOTION SENSOR OPTIONS (46W, 60W)




Built-in motion sensor  
120-277V only  
6 m height max

# WATERPROOF

PQ-WPL4

## DIMENSIONS (135TW, 200TW)

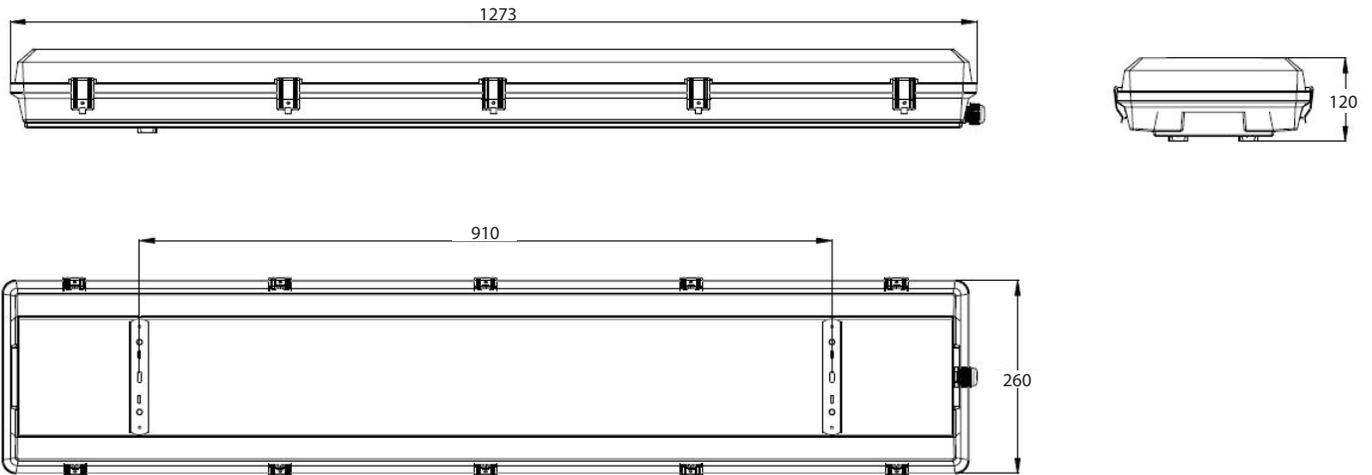

## MOTION SENSOR OPTIONS (135TW, 200TW)



Built-in motion sensor  
120-277V only  
6 m height max

# WATERPROOF

PQ-WPL4

## OPTION: EMERGENCY LED DRIVER (EMB)



### FEATURES

- Split design, external battery for flexible installation and narrow space.
- Constant output power.
- Long life high temperature recyclable LiFePO4 battery, meet 2000 cycles of charge and discharge.
- Includes 2 in 1 test switch and charge indicator light.
- 5 year limited warranty.

### ELECTRICAL SPECIFICATIONS

- Input Voltage: 100-347Vac, 50/60Hz
- Input Current: 100mA max
- Input Power: 7W max
- Recharge Time: 24 Hours
- Discharge Time: 90 minutes
- Battery: LifePO4 battery




MODEL	Input Voltage	Output Voltage	Output Power	Charging Time	Discharging Time	Battery Type
EMB	100-347VAC	36-56Vdc	15W	24 Hours	90 minutes	LifePO4 battery
		90-260Vdc				

# WATERPROOF


PQ-WPL4

## DIMENSIONS

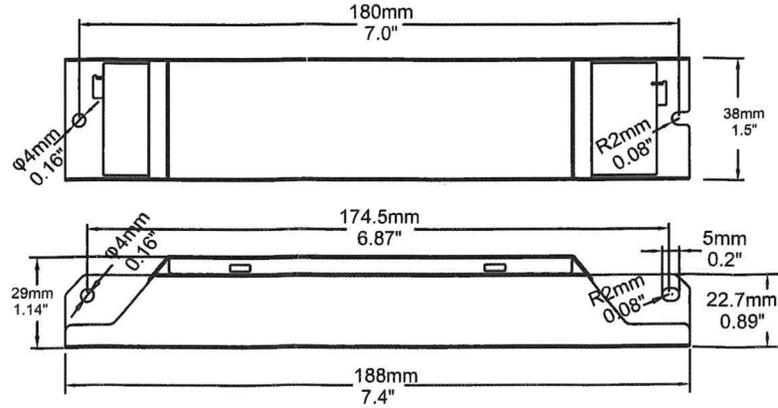

### • DRIVER

7.4" x 1.5" x 1.14"  
 188 mm x 38 mm x 29 mm  
 Mounting center - 7.01"

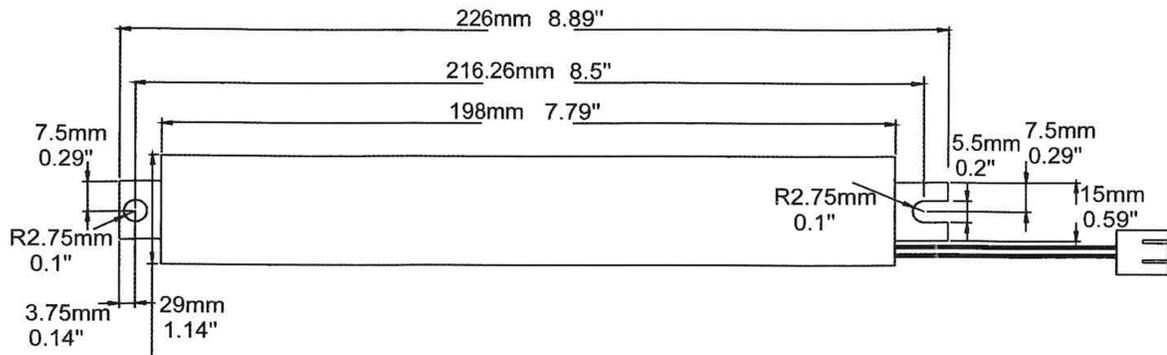


### • 15W Battery

8.89" x 1.14"  
 226 mm x 29 mm  
 Mounting center - 8.50"


# WATERPROOF

PQ-WPL4

## OPTIONAL TEST SWITCH

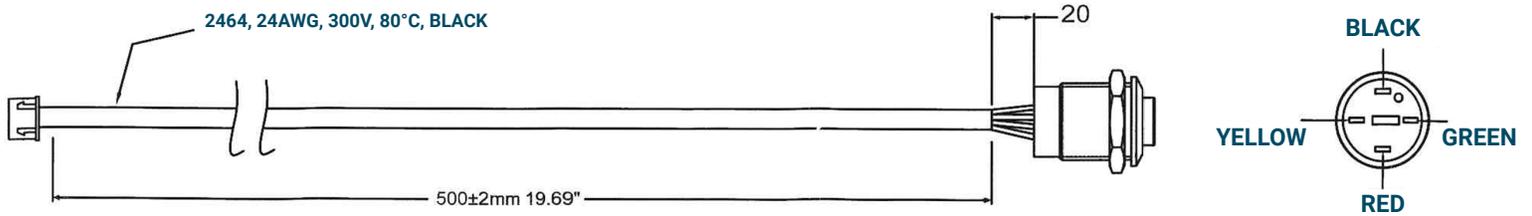

• Metal Test Switch

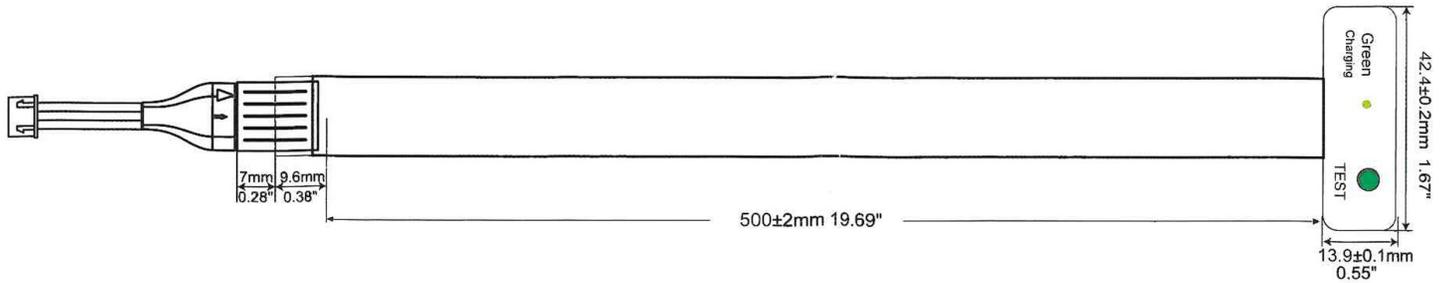

• Skinny Film Test Switch