PRODUCT DATA SHEET

WALL PACK

PQ-WKD

- Robust exterior wall light for parking areas, entrances, walkways, loading docks, etc.
- Diecast aluminum housing with heavy duty powder coat finish, black or brown
- High impact textured borosilicate glass lens, hinged for easy maintenance
- Specular anodized aluminum reflector for high efficiency output
- Size : 310 x 300 x 160 mm

5 YEAR WARRANTY

Lifespan 50,000 HOURS

CRI 80+ Ra

>0.98 Power Factor

IP65 IP LEVEL

SPECIFICATIONS

Input voltage	90-305 V, 200-480V	Lifespan	50000 h
Working Temperature	-40°C to 45°C	Color Temperature	4000K - 6500K
LED Light Source	Philips/Samsung/Osram	Color Rendering Index	>82
IP Rating	IP65/4NEMA	Warranty	5 years
LED Luminous Efficiency	95-110 lm/w	Power Factor	≥0.98

MODEL	POWER (W)	LUMINOUS FLUX
PQ-WKD-XXK-40W	40	4000
PQ-WKD-XXK-65W	65	5500
PQ-WKD-XXK-80W	80	7600
PQ-WKD-XXK-100W	100	9800
PQ-WKD-XXK-120W	120	11700

XX= Color Temperature : 41K=4000-4500K 51K=5000-5500K 61K=6000-6500K
ADD at the end Voltage : 120V, 240V or 347V

DIMENSIONS

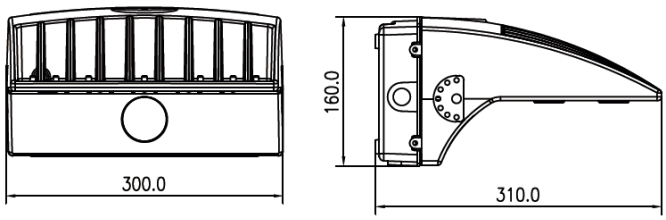

LISTINGS

RoHS

9600 Boul St-Laurent, Suite 300, Montreal, Quebec - H2N 1R1 • Tel: 514 667-6810 / Fax : 514 667-5722 • info@power-q.ca