

INDIRECT TROFFER

PQ-TRSL

**Color Tunable
3500-4000-5000K**

**3 models
Wattage Tunable**

Installed into existing troffers without entering into the ceiling space, our innovative LED Indirect Troffer helps to keep your existing fixture but convert it to high efficiency and performance of LEDs.

It replaces outdated fluorescent lighting systems and offers an economical solution to upgrade safely. It offers superior light output that reaching up to 125lm/w, and with 0-10V dimming.



MODEL	INPUT VOLTAGE	POWER (W)	LUMENS	DIMENSION
PQ-TRSL14-5CCTK-40TW-UNIV-D	100-347 V	25,30,40	3125-6250	1x4 ft
PQ-TRSL22-5CCTK-40TW-UNIV-D		25,30,40	3125-6250	2x2 ft
PQ-TRSL24-5CCTK-50TW-UNIV-D		35,40,50	4375-6250	2x4 ft


SPEIFICATION

Efficacy	125 LPW	Power Factor	>0,9
CRI	Ra>80	Standard Lifetime	Designed to L70 min. 50,000 hours
DLC CCT	3500, 4000, 5000	Dimming	0-10V dimming
Input current	0.55A	THD	<20%


INDIRECT TROFFER

PQ-TRSL


DIMENSIONS

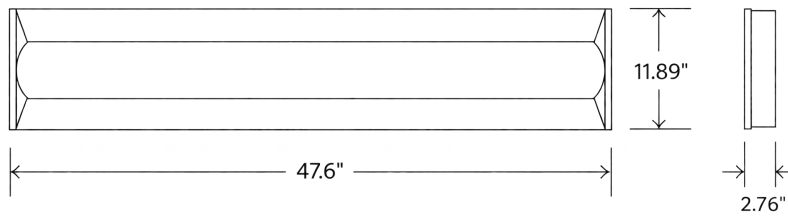

PQ-TRSL14

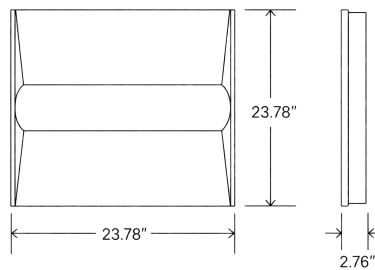

PQ-TRSL22

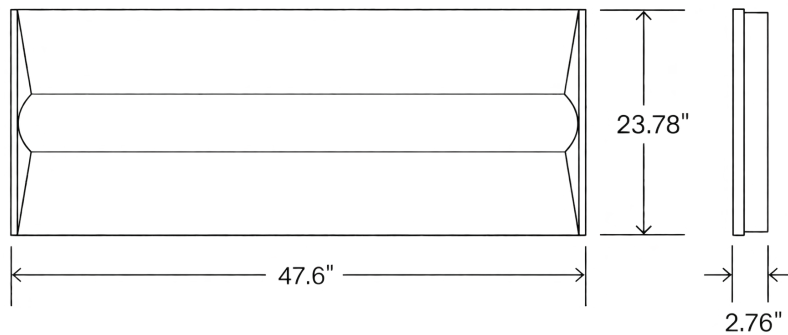

PQ-TRSL24