

LED LINEAR LIGHT

PQ-LFP-LFPL

- Aluminum body, PC cover
- Replaceable LED strips
- Isolated LED driver
- Length available from 2 / 4 / 5 FT

Options:

- Dimmable
- Microwave motion sensor
- Emergency battery back up



LED LINEAR LIGHT

Models	Type	Color Temperature (CCT)	Power (W)	Lumens	Length (FT)	Dimensions (mm) (L*W*H)
LFP	Slim Version	030K = 3000K	20W	2600lm	2 FT	582 x 60 x 53
			40W	5200lm	4 FT	1192 x 60 x 53
		040K = 4000K	50W	6500lm	5 FT	1498 x 60 x 53
			60W	7800lm	5 FT	1498 x 60 x 53
LFPL	Wide Version	050K = 5000K	20W	2100lm	2 FT	582 x 81 x 50
			40W	4200lm	4 FT	1192 x 81 x 50
		060K = 6000K	50W	5250lm	5 FT	1498 x 81 x 50
			60W	6300lm	5 FT	1498 x 81 x 50
		065K = 6500K				

CERTIFICATIONS



LED LINEAR LIGHT

PQ-LFP-LFPL

SPECIFICATIONS		
Models	LFP	LFPL
Type	Slim Version	Wide Version
Power (W)	20 / 40 / 50 / 60	
Color Temperature (CCT)	3000K / 3500K / 4000K / 5000K / 6000K / 6500K	
Efficacy	120 Lm/W	
Power Factor	>0.9	
CRI	>83	
Voltage	AC100-277V, 347V	
Frequency	50/60	
LED Chips	Epistar SMD2835	
Beam Angle	120°	
Dimmable	0-10V dali	
IP Rating	IP40	
Lifespan	50000 Hrs	
Body Material	Aluminum Housing, PC Cover	
Lengths	2/4/5 ft	
Installation	Surface Mount, Wall Mounted, Suspended	
Color Options	White, Silver, Black	
Certifications	cETLus, DLC, TUV, CB, SAA	
Warranty	5 Years	

INSTRUCTIONS FOR ORDERING WITH PREFERRED DIMENSIONS



Catalog Number for Example: PQ-LFP-040K-020W-120V-004P

Models	Color Temperature (CCT)	Power (W)	Input Voltage (V)	Length
PQ-LFP PQ-LFPL	030K = 3000K	020W = 20	120V = 100-277 347V = 347	002P = 2 Feet 004P = 4 Feet 005P = 5 Feet
	040K = 4000K	040W = 40		
	050K = 5000K	050W = 50		
	060K = 6000K	060W = 60		
	065K = 6500K			

LED LINEAR LIGHT

PQ-LFP-LFPL

DIMENSIONS

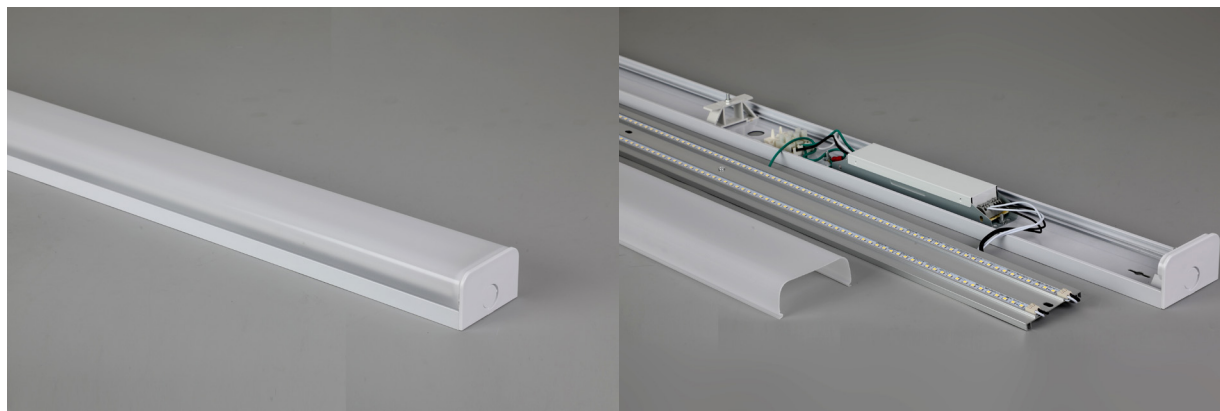

LFP: Slim Version



Power (W)	Lumens	Length (FT)	Dimensions (mm) (L*W*H)
20W	2600lm	2 FT	582 x 60 x 53
40W	5200lm	4 FT	1192 x 60 x 53
50W	6500lm	5 FT	1498 x 60 x 53
60W	7800lm	5 FT	1498 x 60 x 53

LFPL: Wide Version



Power (W)	Lumens	Length (FT)	Dimensions (mm) (L*W*H)
20W	2100lm	2 FT	582 x 81 x 50
40W	4200lm	4 FT	1192 x 81 x 50
50W	5250lm	5 FT	1498 x 81 x 50
60W	6300lm	5 FT	1498 x 81 x 50