
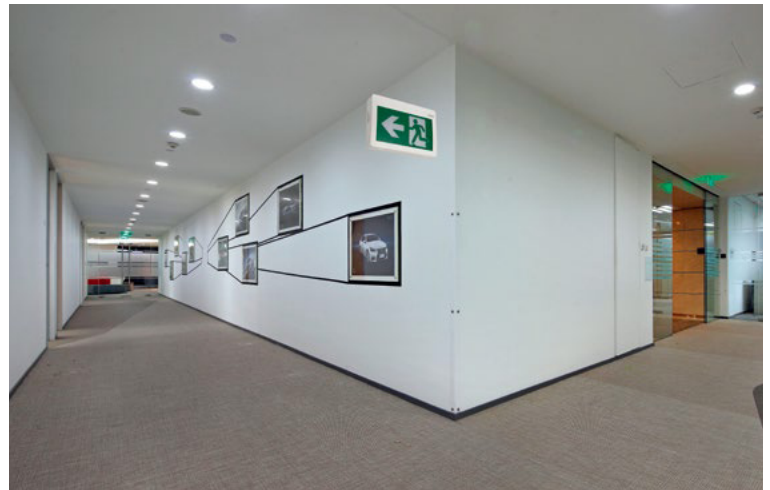


EXIT LIGHT

PQ-EMCY-126


- Thermal plastic ABS housing and PC+PVC panel
- High efficiency LED
- UL-94V-0 flame rating, fire-resistant
- Universal wall mount and ceiling mount
- Dimension: 335 x 230 x 50mm
- Push button test switch

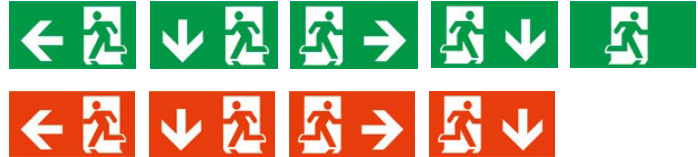


DIMENSIONS



VISIBLE DISTANCE

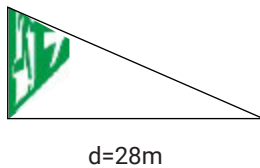

PHOTOMETRIC DATA

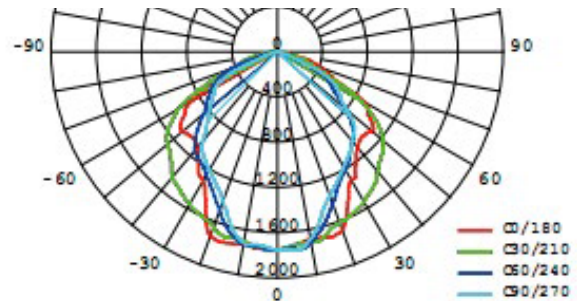

SPECIFICATIONS

Input Voltage	220VAC-240VAC input (CE) 120VAC-347VAC input (CSA/UL)	Emergency time	3 hours (CE) 2 hours (CSA/UL)
Max power consumption	1W	Battery	3.6V Nickel Cadmium
Charging time	24 hrs	Operating temperature	5°C ~ 30°C