PRODUCT DATA SHEET

LED LINEAR BAND

PQ-HBLT2, PQ-HBLT4

- Energy efficient linear LED light technology provides general lighting for a variety of applications, meeting DLC 4.2 Premium standard.
- Optional emergency battery backup for 90 minutes duration in need.
- Microwave motion sensor optional for more energy saving.
- Driver comes with standard 0-10V dimming function. No flicker.
- Surface-mounting and cable-suspended installations as options.

5 YEAR WARRANTY | Lifespan 50,000 HOURS | CRI 80+ Ra | 120° Beam Angle | >0.9 Power Factor

MODEL	POWER (W)	LUMENS (130LM/W)	LUMENS (150LM/W)	SIZE
PQ-HBLT2-XXK-100W	100W	13000lm	15000lm	2FT
PQ-HBLT2-XXK-165W	165W	21450lm	24750lm	2FT
PQ-HBLT4-XXK-165W	165W	21450lm	24750lm	4FT
PQ-HBLT4-XXK-210W	210W	27300lm	31500lm	4FT
PQ-HBLT4-XXK-300W	300W	39000lm	45000lm	4FT

LISTINGS

SPECIFICATIONS

Input Voltage	AC100-277/277-480V	CCT	35/40/45/50K
Operating Frequency	50/60Hz	CRI	80Ra
Power Factor	>0.9	Lifespan	50000 hrs
THD	20%	Beam Angle	120°
Warranty	5 years	Function	0-10V or microwave motion sensor

9600 Boul St-Laurent, Suite 300, Montreal, Quebec - H2N 1R1 • Tel: 514 667-6810 / Fax : 514 667-5722 • info@power-q.ca

www.power-q.ca

PRODUCT DATA SHEET

LED LINEAR BAND

PQ-HBLT2, PQ-HBLT4

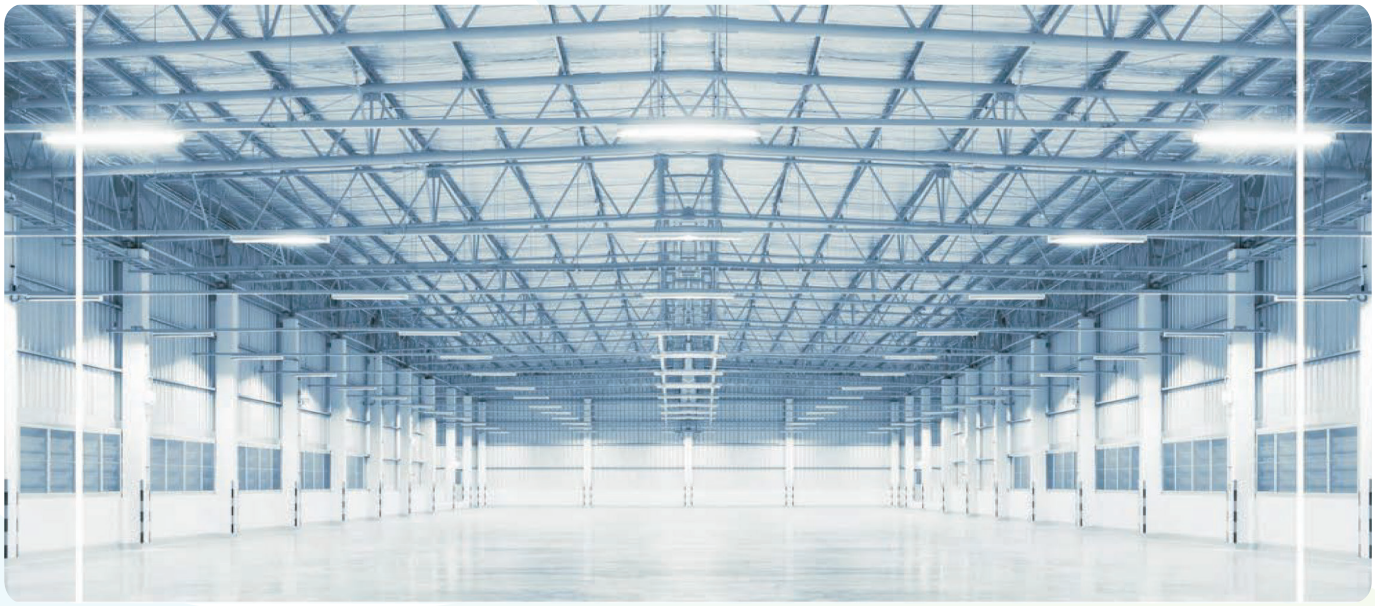

DIMENSIONS

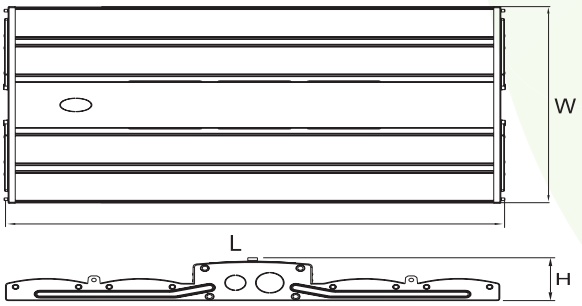

Product	L(mm)	W(mm)	H(mm)
2 ft	560±1.5	246±1.5	58±1.5
2 ft	560±1.5	398±1.5	58±1.5
4 ft	1160±1.5	246±1.5	58±1.5
4 ft	1160±1.5	398±1.5	58±1.5

9600 Boul St-Laurent, Suite 300, Montreal, Quebec H2N 1R1 • Tel: 514 667-6810 / Fax : 514 667-5722 • info@power-q.ca