


# CANOPY

## PQ-CYW

- Injection molded anti-UV PC diffuser
- Robust diecast aluminum housing with anti-corrosive coating
- Fully sealed to be waterproof
- Optimized thermal system
- Smart control and SPD available
- UL listed for wet locations
- Ideal for garages, parking lots, gas stations, toll stations, tunnels and warehouses



### DIMENSIONS

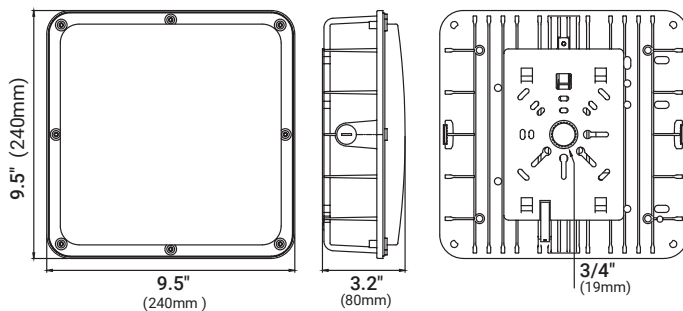

### LISTINGS



| MODEL          | POWER (W) | LUMINOUS FLUX (LM) |
|----------------|-----------|--------------------|
| PQ-CYW-XXK-40W | 40        | 4400 lm            |
| PQ-CYW-XXK-70W | 70        | 7700 lm            |

XX= Color Temperature : 41K=4000-4500K 51K=5000-5500K

### SPECIFICATIONS

|                   |                                   |                       |                           |
|-------------------|-----------------------------------|-----------------------|---------------------------|
| LED Light Source  | SMD3030                           | IP rating             | IP65                      |
| Fixture efficacy  | 110 lm/W                          | Lifespan (L70)        | 50000 hrs                 |
| CCT               | 4000K/5000K                       | Thermal dissipation   | Aluminum                  |
| Lens              | PC                                | Operating temperature | -40°~45°C                 |
| CRI               | >80Ra                             | Operating humidity    | 10%-90%                   |
| System efficiency | >90%                              | Material              | Aluminum + PC lens        |
| Power supply      | UL certified driver               | Color                 | White, black, dark bronze |
| Input voltage     | 100-277VAC/100-347VAC (universal) | Dimensions            | 10.43" x 10.43" x 3.48"   |
| Power frequency   | 50/60 Hz                          | Weight                | 5.9 lbs/2.65 kg           |
| Power efficiency  | 92%                               | Warranty              | 5 years                   |
| Power factor      | 0.95                              | Certification         | UL, cUL, DLC, CE          |
| THD               | <15%                              |                       |                           |

# CANOPY

PQ-CYW

## FEATURES

### FAST FIXING BRACKET

Specially designed bracket for J-box and ceiling installations. Fast, easy, labor-saving installation.

### 3/4" THREADED HOLE

Wire can pass through for pendant installation with hook and pipe.

### ROBUST HOUSING

High pure aluminum die-cast housing with excellent thermal performance. Anti-corrosive coating enhances the durability.



### 3 x 1/2" THREAD

1/2" threads are available in 3 directions for side wiring. Fixtures can be easily interconnected.





## INSTALLATIONS


1



3



2



4

