


EXPLOSION PROOF LED EXIT LIGHT

PQ-EXCY

- High durability and reliability.
- Label content customizable.
- Low working wattage for energy saving.
- High leakproofness up to IP66.
- 3/4" NPT or M25 conduit hubs.
- Pendant, wall and end bracket mounts provide universal installation options. Hinged-access door.
- Beam angle can be wide or narrow.
- Various languages available.
- Can be used outdoors.
- Edge-lit sign.
- Emergency backup battery for exit sign and spotlight for contingency period of 180 minutes
- Two top bright spotlights can be adjusted in horizontal and vertical directions.
- LED circuit board and driver can be replaced in field easily.



DIMENSIONS

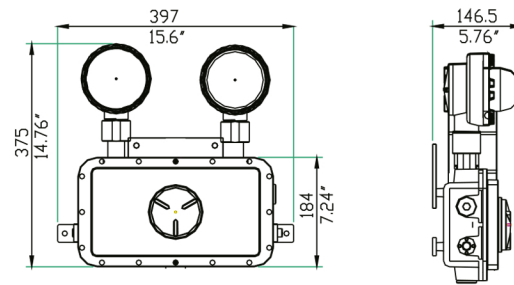

MODEL	LED POWER (W)	LUMINOUS FLUX
PQ-EXCY-8W-120V	8	1040 lm
PQ-EXCY-11W-120V	11	1430 lm

SPECIFICATIONS

Input Voltage	100-277V or DC12-48V	Mounting sling	Stainless steel
Housing	A360 diecast aluminum	Sign panel	Glass
Indicator	Tempered glass	IP Ratings	IP66
Bolts	Stainless steel	Warranty	5 years

ACCESSORIES



Model: Ex-Junction01
Name: Junction Box
Material: Aircraft Aluminum A383



Model: Ex-Hook
Name: Installation Hook
Material: Aircraft Aluminum A383



Model: Ex-Conduit-01
Name: Metal Conduit
Material: Stainless Steel and Aluminum



Model: Ex-SPipe
Name: Winding Swing Pipe
Material: Iron with Powder Coating



Model: Ex-90J Support
Name: 90° Arm to Junction Box
Material: Aircraft Aluminum A383



Model: Ex-25J Support
Name: 25° Arm to Junction Box
Material: Aircraft Aluminum A383



Model: Ex-Arm
Name: Mounted Arm
Material: Aluminum



Model: Ex-Chain
Name: Pendant Chain
Material: Stainless Steel S30400