

WALL WASHER LINEAR LIGHT

PQ-LIWW

Power-Q's wall washer LED linear downlights come complete with an external driver in a junction box.

The design is prized for classic good looks, performance and flexibility, suitable for many different applications.

- **Airtight & Type IC rated:** no housing required
- **Fast and easy installation** saves labor costs
- **Junction box included:** No additional hardware required
- **Professional asymmetric optical design**
- **CRI 80:** True color rendering
- **ETL-listed:** reliable quality and safe operation
- **Suitable for damp locations**
- **Voltage:** 100-130V AC with Triac dimming, AC277V non-dimmable



- **Appearance:** Sleek, simple design makes for an attractive, marketable unit.
- **Body:** High quality aluminum casing, aluminum heat sink, high thermal conductivity material
- **LEDs:** High brightness and high CRI LED, which guarantees high lumen and high quality
- **Beam angle:** beam angle of 15/30/45° available for different applications
- **Driver:** Isolated LED driver with 5-year warranty.
- **Junction Box:** Included, install directly in insulated ceilings without any thermal housing.
- **UGR:** The innovative black anti-glare screen offers low unified glare rating (UGR)
- **Application:** can climb walls, cross ceilings, literally go everywhere your design wants it to be.





SPECIFICATIONS

		147mm	280mm
Input voltage	100-277VAC, 50/60 Hz		
CRI	Ra>90	Input power	10W / 18W
Power factor	>0.9	Lumen	600 lm / 1100 lm
LED chip	SMD3030	Halogen equivalent	60W / 110W
Beam angle	100°	Efficiency	60 lm/w / 65 lm/w
Color temperature	2700-6500K	Dimension	147x45x49 mm / 280x45x49 mm
Cutout size	139x36 mm		
Dimming	Triac dimming 10-100%	Certification	ETL, cETL
Approved locations	Insulated ceilings	Warranty	5 years
Airtight	Yes	Quantity/carton	20 pcs/carton
Lamp life	70% light output at 50000 hrs	Compatible dimmers	Lutron CTCL-153P / DVCL-153P / S-600P / SLV-600P / CN-600P / Leviton 6674 / 6672

WALL WASHER LINEAR LIGHT

PQ-LIWW

DIMENSIONS (mm)

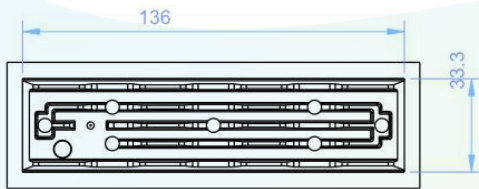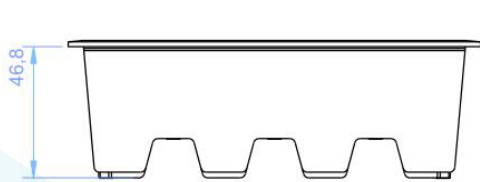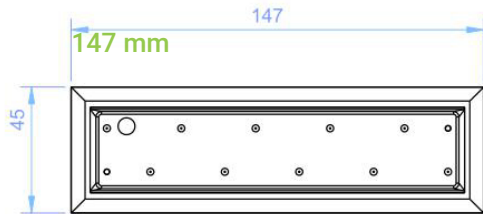

280 mm

