

# BACKLIT LED PANEL

## PQ-PNJB

- Power and CCT tunable
- Without LGP, never turns yellow
- Isolated driver
- Super bright SMD2835 LEDs, 130LM/W
- Non-flicker, no dark spot, protects your eyes
- Ideal replacement for traditional troffer with over 80% energy saving
- 5-year warranty



### SPECIFICATIONS



Input voltage	AC100-347V	IP rating	IP40
CCT adjustable	3000K / 3500K / 4000K / 5000K	Operating temperature	-20°C~50°C
LED source	SMD2835	Dimming	0-10V dimming
CRI	>80	Power factor	≥ 0.95
LM	LM80	Total harmonic distortion	<15%
Lumens	130 lm/w	Emergency function optional	90 minutes

CCT TUNABLE MODELS	POWER (WATTS)	SIZE (INCHES)	NET WT (LBS)
PQ-PNJB22-CCTK	20-25-30-35	24 x 24	5.07
PQ-PNJB14-CCTK	20-25-30-35	12 x 48	5.51
PQ-PNJB24-CCTK	35-40-45-50	24 x 48	9.26

# BACKLIT LED PANEL

PQ-PNJB

## DIMENSIONS

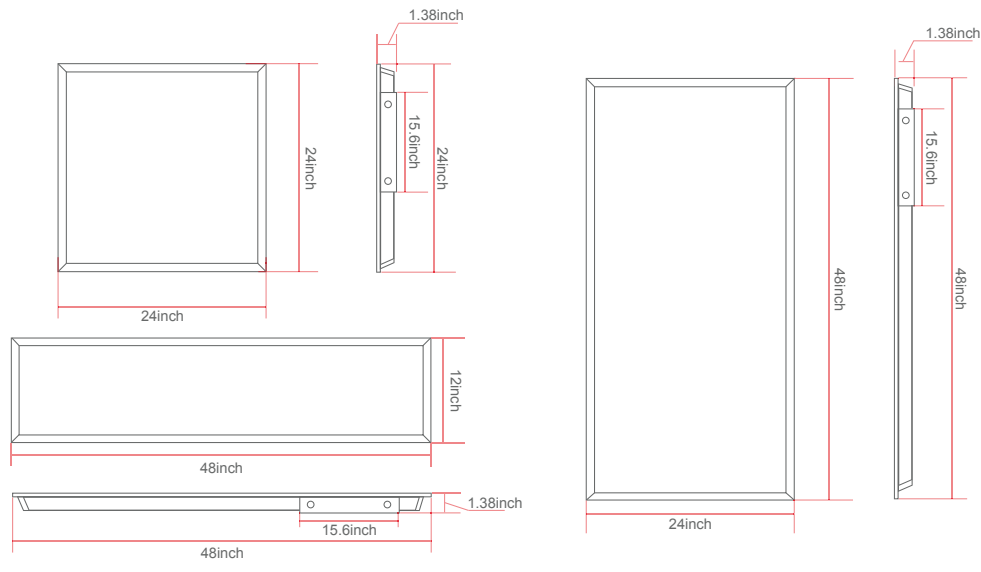
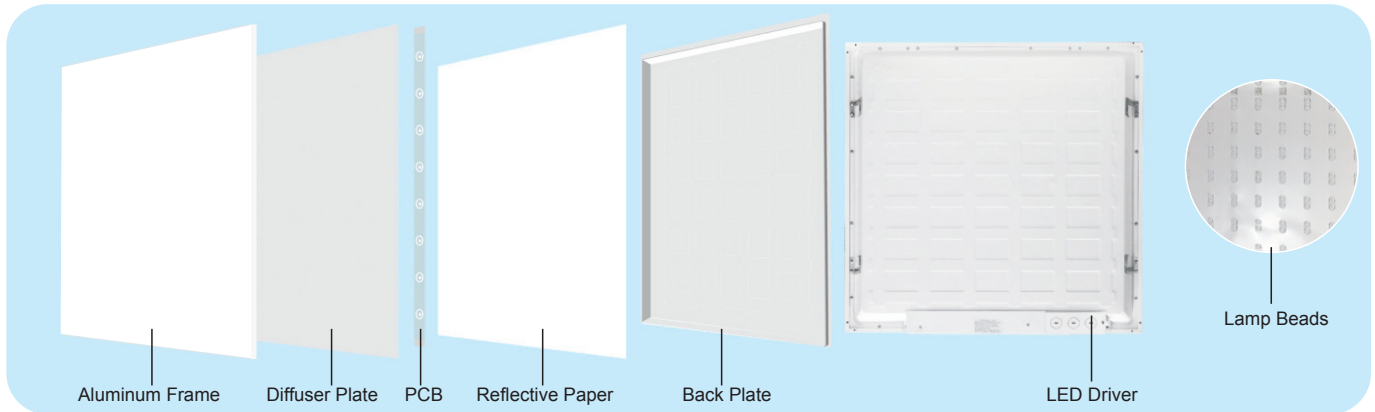


# BACKLIT LED PANEL

PQ-PNJB

## LUMINAIRE PHOTOMETRIC TEST REPORT

### 24 X 24 INCHES, 35W

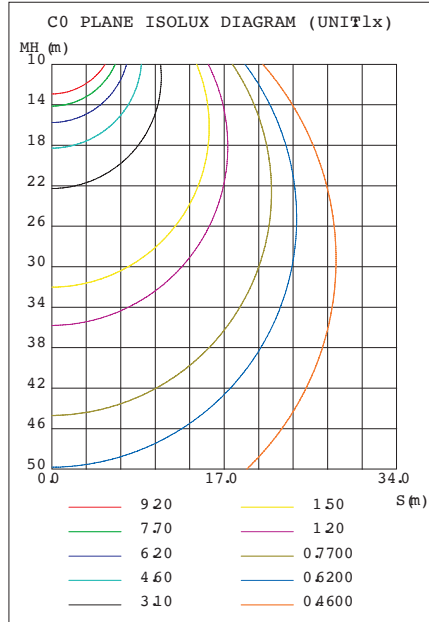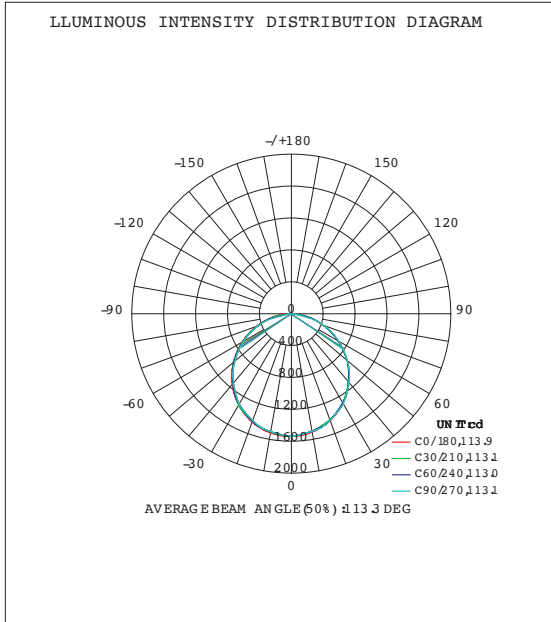

### 24 X 48 INCHES, 50W

