

# LED LINEAR TUBE

## PQ-LIS2-4-8



- CCT Tunable: 3000-4000-5000K
- Wattage adjustable
- Voltage 100-347V
- Linkable
- Emergency backup and sensor optional
- Easy installation, suspended or surface mounted
- For industrial applications, warehouses, garages, workshops or commercial locations

Round PC lens



optional microwave sensor

### SPECIFICATIONS

Input Voltage	100-347 VAC	Dimming	0-10V
CRI	>80	Beam angle	120°
LED source	Seoul SMD LED	CCT	3000K, 4000K, 5000K
Luminous efficiency	130 lm/W	Operating temperature	-20°C~45°C

MODEL	WATTAGE	LENGTH	ORDERING CODE
-------	---------	--------	---------------

#### CCT tunable and power tunable models

PQ-LIS2	15-18-22-25W	2 ft	PQ-LIS2-CCTK-25TW-UNIV
PQ-LIS4	30-36-40-50W	4 ft	PQ-LIS4-CCTK-40TW-UNIV
PQ-LIS8	60-68-72-82W	8 ft	PQ-LIS8-CCTK-82TW-UNIV


#### Standard model

PQ-LIS8	65W	8ft	PQ-LIS8-XXK-065W-UNIV
---------	-----	-----	-----------------------

XX= Color Temperature : 31K=3000K-3500K 41K=4000-4500K 51K=5000-5500K  
Add S at end for optional sensor

MODEL	A	B	C
2 ft	23.98"		
4 ft	47.99"	2.62"	2.56"
8 ft	95.98"		

### DIMENSIONS

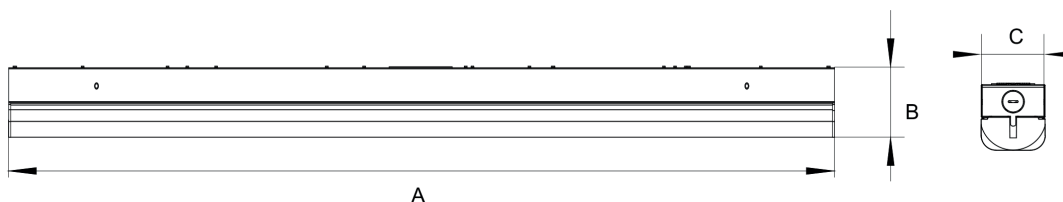

# LED LINEAR TUBE

PQ-LIS2-4-8

## 12 Volt DC Motion Detector 5.8GHz ± 75MHz Microwave Frequency Dimmable Motion Detector



- Liner design sensor with operating voltage of 12VDC for ceiling light, tri-proof light, batten light and panel light.
- With 9 DIP switch keys, it provides more options for hold time, detection area, standby period, standby dimming level and daylight threshold.
- Turn off the light or dim the light when no movement is detected to save energy and maintain sustainability.
- Quickly resume 100% brightness when movement is detected under insufficient daylight.
- With the rod antenna, the module is super compact to be easily installed inside tri-proof and linear lights with a very small hole.
- IP20 and 5-year warranty.
- Certificate of CE/RoHs