

LED LINEAR STRIP FIXTURE

PQ-LIG2-4-8

Ideal choice for residential, commercial and industrial lighting. Steady performance and long lifetime.


- Lumen output more than 130 lm/w, reduces energy consumption up to 80% compared to fluorescent fixtures
- 3 CCTs : One fixture, 3 color temperatures (3500K, 4000K, 5000K)
- Power tunable
- Ceiling mount or cable mount
- Linkable (4 ft to 8 ft) with additional parts



SPECIFICATIONS

Input Voltage	120-347V or 120-277V	Housing	Metal
Luminous efficiency	130 lm/W	Mounting	Ceiling mount or cable mount
CRI	80	Humidity	20%-85%, RH, non-condensing
Color temperature	3500K / 4000K / 5000K	Certification	ETL, cETL, DLC5.1, LM-79, LM-80(LED)
Lifespan	50,000 hrs	Operating temperature	-4°F to 122°F (-20°C to +50°C)
Color consistency	Proprietary binning for uniform color	Environment	Damp-listed
Power factor	0.99	Warranty	5 years
Dimming	0-10V		


LINKING – 2 PCS 4 FT CAN LINK TO MAKE 1 PC 8 FT

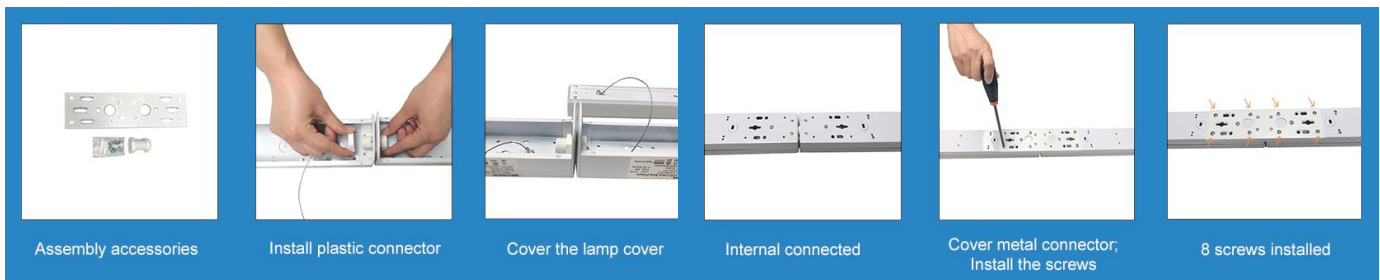

LED LINEAR STRIP FIXTURE

PQ-LIG2-4-8

DIMENSIONS

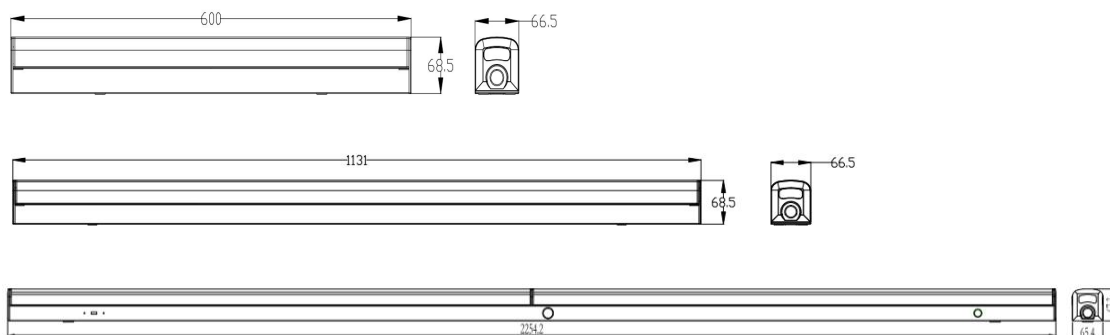

MODEL	SIZE (IN)	SIZE (mm)	POWER	LUMENS
PQ-LIG2	23.62" × 2.62" × 2.7"	638 × 66.5 × 8.5	15-20-25W	3250
PQ-LIG4	44.53" × 2.62" × 2.7"	1131 × 66.5 × 8.5	30-38-46W	5980
PQ-LIG8	88.75" × 2.62" × 2.7"	2254.2 × 66.5 × 8.5	55-65-75-90W	11700