

# TUNABLE TUBE

## PQ-TUX4

- Type A+B
- Triac Dimming.
- Work with or without ballast in one tube.
- Base: G13
- 130 LPW high lumen efficiency.
- Adjustable CCT:  
3000K / 3500K / 4000K / 5000K / 6000K / 6500K
- Can be double end and single end in one tube.



### TUNABLE TUBE

Model	Color Temperature (CCT)	Ajustable Power (TW)	Input Voltage (V)
PQ-TUX4	3000K / 3500K / 4000K / 5000K / 6000K / 6500K	10 / 12 / 15 / 18 / 20 / 22	100-347AC

### CERTIFICATIONS




# TUNABLE TUBE

PQ-TUX4

## SPECIFICATIONS

Ajustable CCT	3000K/3500K/4000K/5000K/6000K/6500K
Adjustable Power (TW)	22W/20W/18W/15W/12W/10W
Lumens	2860/2600/2340/1950/1560/1300
LED Type	SMD2835
Input voltage	100-347VAC
CRI	85
Efficiency	130 lm/W
Dimensions	4ft
Base	T8 G13
Frequency	50/60 Hz
Power Factor	0.95
Lifespan	50,000 hrs
Lens Cover	Frosted
Housing	Aluminum alloy and polycarbonate
Operating Temperature	-20°C to 40°C

## DIMENSIONS

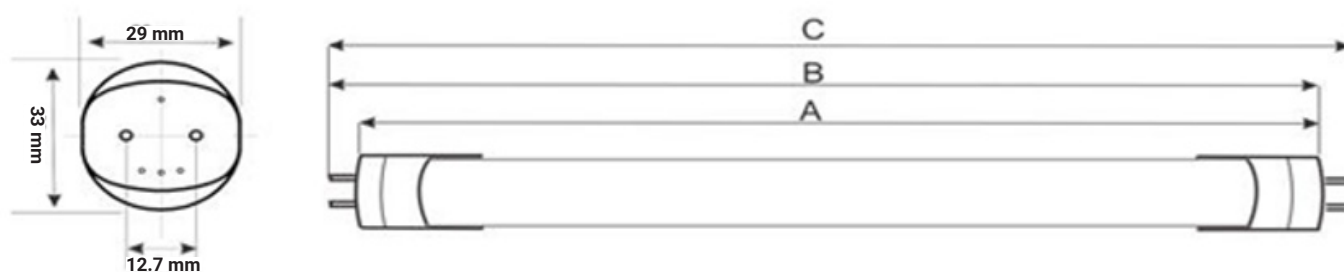


Length (A)	1212 mm
Diameter	26 mm

# TUNABLE TUBE

PQ-TUX4

## APPLICATIONS

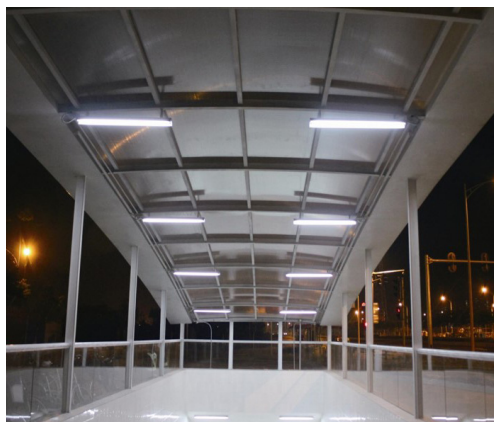

## INSTRUCTIONS FOR ORDERING

TUNABLE TUBE			
Model	Color Temperature (CCT)	Ajustable Power (TW)	Input Voltage (V)
PQ-TUX4	6CCTK = 3000K / 3500K / 4000K / 5000K / 6000K / 6500K	022TW = 10 / 12 / 15 / 18 / 20 / 22	UNIV = 100-347AC

**Catalog Number for Example: PQ-TUX4-6CCTK-022TW-UNIV**