PRODUCT DATA SHEET

TUNABLE TUBE

PQ-TUX4

- Hybrid: Type A+B
- Work with or without ballast in one tube.
- Base: G13
- 130 LPW high lumen efficiency.
- Adjustable CCT:
  3000K / 3500K / 4000K / 5000K / 6000K / 6500K
- Can be double end and single end in one tube.

Warranty 5 YEARS

Lifespan 50 000 HRS

WATTAGE SELECTABLE

COLOR TUNABLE

TUNABLE TUBE			
Model	Color Temperature (CCT)	Ajustable Power (TW)	Input Voltage (V)
PQ-TUX4	3000K / 3500K / 4000K / 5000K / 6000K / 6500K	10 / 12 / 15 / 18 / 20 / 22	100-347AC

CERTIFICATIONS

DLC PREMIUM

ETL Intertek

RoHS

9600 Boul St-Laurent, Suite 300, Montreal, Quebec - H2N 1R1 • Tel: 514 667-6810 / Fax : 514 667-5722 • info@power-q.ca

www.power-q.ca

TUNABLE TUBE

PQ-TUX4

SPECIFICATIONS	
Ajustable CCT	3000K/3500K/4000K/5000K/6000K/6500K
Adjustable Power (TW)	22W/20W/18W/15/W12W/10W
Lumens	2860/2600/2340/1950/1560/1300
LED Type	SMD2835
Input voltage	100-347VAC
CRI	85
Efficiency	130 lm/W
Dimensions	4ft
Base	T8 G13
Frequency	50/60 Hz
Power Factor	0.95
Lifespan	50,000 hrs
Lens Cover	Frosted
Housing	Aluminum alloy and polycarbonate
Operating Temperature	-20°C to 40°C
Options	Rotating

DIMENSIONS

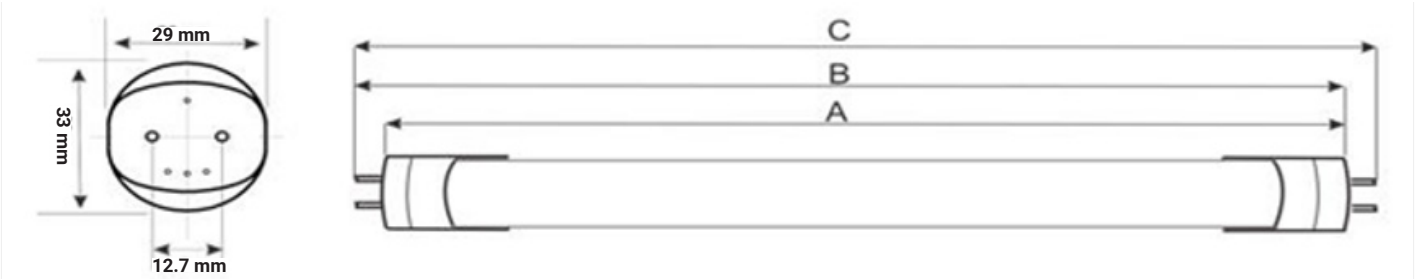

Length (A)	1212 mm
Diameter	26 mm

PRODUCT DATA SHEET

TUNABLE TUBE

PQ-TUX4

APPLICATIONS

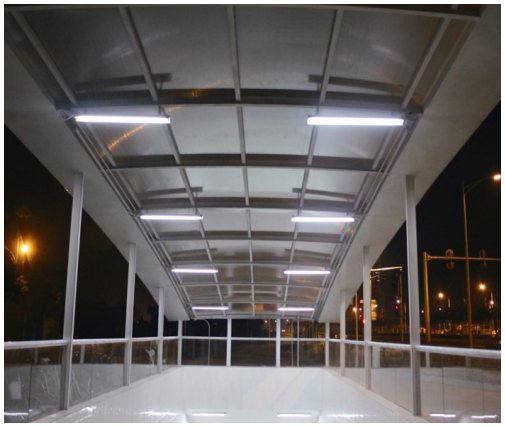

INSTRUCTIONS FOR ORDERING

TUNABLE TUNE					
Model	Color Temperature (CCT)	Ajustable Power (TW)	Input Voltage (V)	Type	Options
PQ-TUX4	6CCT = 3000K / 3500K / 4000K / 5000K / 6000K / 6500K	TW22 = 10 / 12 / 15 / 18 / 20 / 22	UNIV = 100-347AC	HYB = Type A+B	R = Rotating

Catalog Number for Example: PQ-TUX4-6CCT-TW22-UNIV-F-HYB-R

9600 Boul St-Laurent, Suite 300, Montreal, Quebec - H2N 1R1 • Tel: 514 667-6810 / Fax : 514 667-5722 • info@power-q.ca

www.power-q.ca