

VAPOR TIGHT LINEAR HIGH BAY

PQ-WLHN2-4

- Lumen and CCT Selectable
- 2' and 4' lengths
- NSF listed
- Meets NEMA4X rating
- Optional DC 12V auxiliary port for controls
- Cable, pendant and surface mounting options
- PQ-WLHN2-4 is a cost-effective, high quality solution for indoor & outdoor lighting in manufacturing facilities, big box retailers, and other industrial applications.



CERTIFICATIONS



SPECIFICATIONS

Input Voltage	100-347V	IP rating	IP66, satisfies NEMA4X Standard
Housing	Polycarbonate	Warranty	5 years
Lens	Frosted	Operating temperature	-40°-40°C / -40°-104°F
Selectable lumens	6,500 - 27,000	Lifespan	100000 hrs
Dimming	0-10V	Selectable CCT	3500K-4000K-5000K

MODEL	WATTS	LUMENS	EFFICACY
PQ-WLHN2-050TW	30W	4080 lm	136 lm/W
	40W	5320 lm	133 lm/W
	50W	6500 lm	130 lm/W
PQ-WLHN2-090TW	70W	9520 lm	136 lm/W
	80W	10640 lm	133 lm/W
	90W	11700 lm	130 lm/W
PQ-WLHN4-160TW	120W	16320 lm	136 lm/W
	140W	18620 lm	133 lm/W
	160W	20800 lm	130 lm/W
PQ-WLHN4-200TW	150W	20400 lm	136 lm/W
	175W	23,275 lm	133 lm/W
	200W	26000 lm	130 lm/W


Add S for Sensor

VAPOR TIGHT LINEAR HIGH BAY


PQ-WLHN2-4

ACCESSORIES


- V-hooks for chain mounting are supplied as standard
- Optional mounting kits: surface, junction box and corner
- PIR and microwave sensors available
- Cord available
- We recommend installing an additional surge protector in locations where power surges are possible

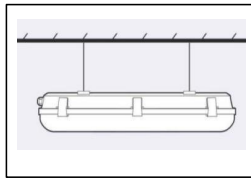


V-hook and chain mounting

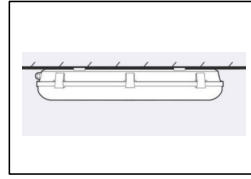


Surface Mount Bracket

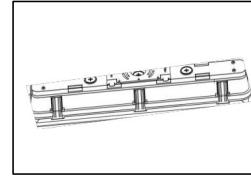

Junction Box Mount Bracket

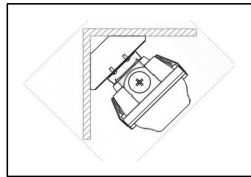


Options: 45° angled bracket

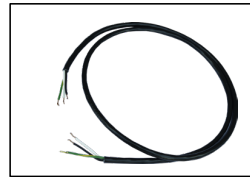


Cord & Plug . Specify Length

DIMENSIONS

2FT:30-100W 4FT: 150-200W

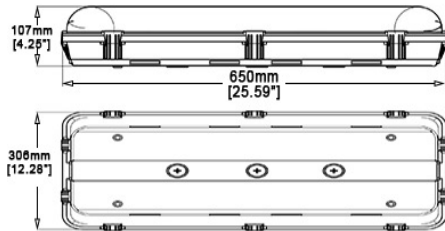

2FT

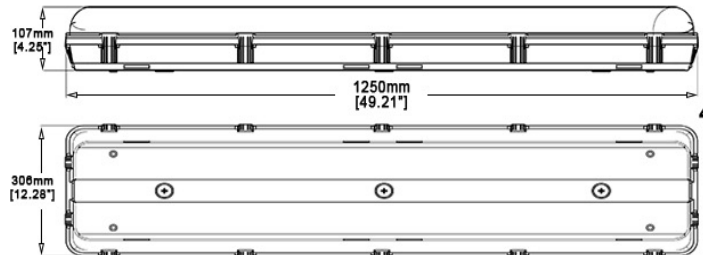

4FT

CONTROL OPTIONS



Max.49ft height

12VDC Microwave Sensor

Factory Default Setting:

- Detection area 100%
- Hold time 5s
- Daylight threshold Disable
- Stand-by period 0s
- Stand-by dimming level 10%.

