

# TRACKLIGHT

## PQ-TK

- Track System



TRACKLIGHT				
Model	Power (W)	Color Temperature (CCT)	Input Voltage	Dimensions (mm)
PQ-TK15	15	031K = 3000K 041K = 4000K 051K = 5000K	AC120V	140 x 55 x 155
PQ-TK30	30			160 x 80 x 172

Catalog number as an example: PQ-TK30-051K-120V

### CERTIFICATIONS



# TRACKLIGHT

PQ-TK

SPECIFICATIONS		
Model	TK15	TK30
Power	15W	30W
Input Voltage	AC120V	
Lumens	1000Lm	2700Lm
Color Temperature CCT	3000K / 4000K / 5000K	
Beam Angle	15° / 24° / 30° / 60°	
Dimmable	Triac dimming	
Led Chips	OSRAM	
CRI	>90	
Shell Color	Black	
Dimensions	140 x 55 x 155 mm	160 x 80 x 172 mm
Certificates	CE, ROHS, cETLus, DLC, SAA	
Lifespan	50,000 hours	
Warranty	5 years	




# TRACKLIGHT


PQ-TK

## DIMENSIONS

### Model TK15

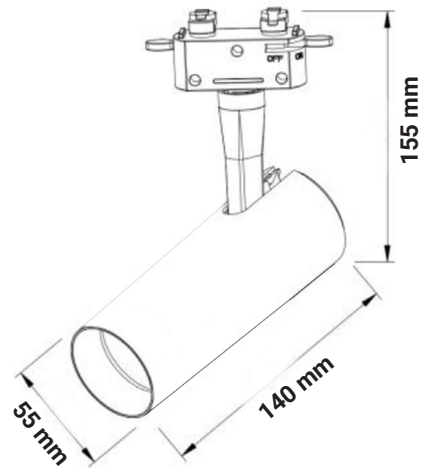

### Model TK30

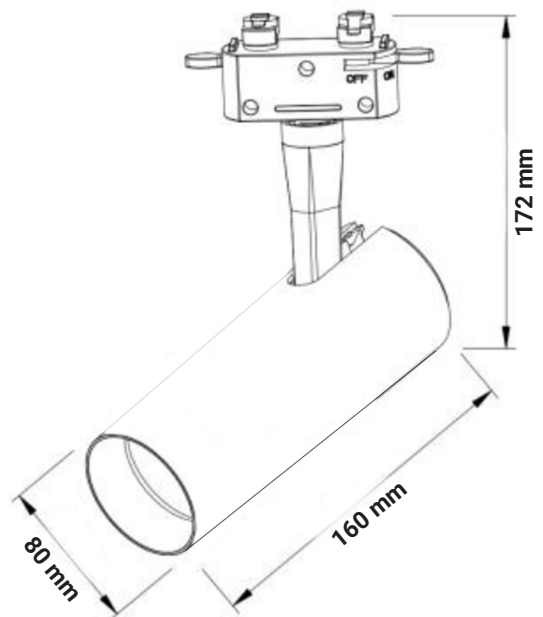

# TRACKLIGHT

PQ-TK

## STRUCTURE OF LENS TYPE




15°


24°

30°

60°

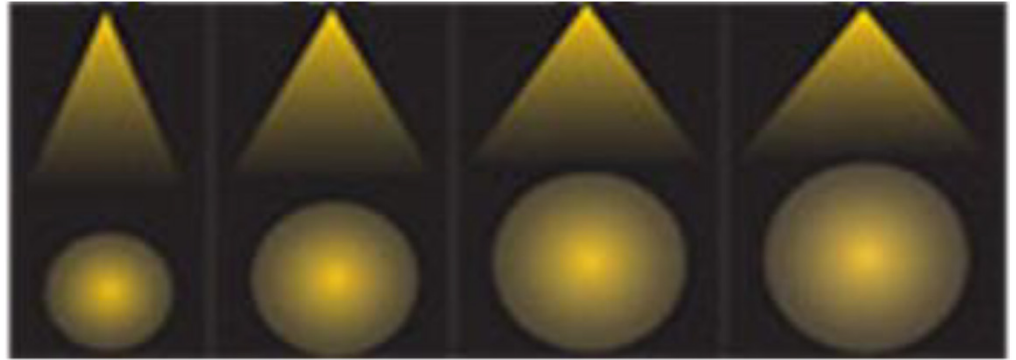


## PHOTOMETRY

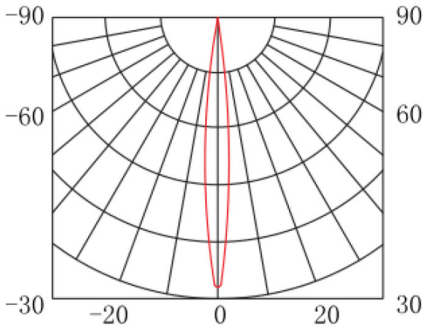

1m	6902 ± 5 lx	33.29cm
2m	1460 ± 5 lx	66.58cm
3m	630 ± 5 lx	99.87cm
4m	363 ± 5 lx	133.16cm
5m	234 ± 5 lx	166.45cm




15°

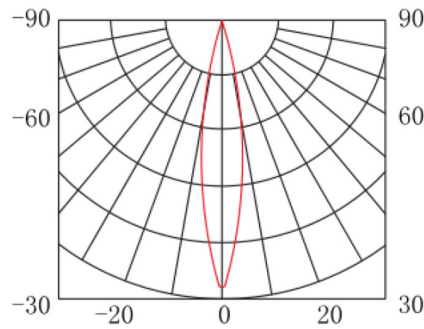

1m	4500 ± 5 lx	37.07cm
2m	1035 ± 5 lx	74.14cm
3m	451 ± 5 lx	111.2cm
4m	262 ± 5 lx	148.27cm
5m	169 ± 5 lx	185.33cm



24°

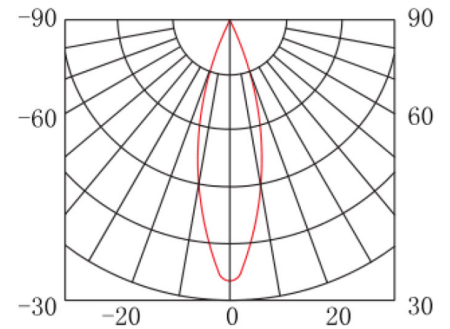

1m	2050 ± 5 lx	71.02cm
2m	541 ± 5 lx	142.04cm
3m	231 ± 5 lx	213.06cm
4m	134 ± 5 lx	284.08cm
5m	90 ± 5 lx	355.1cm



30°