

LED WRAPAROUND LIGHT

PQ-LIWR4

Our LED wraparound light fixtures are perfect for offices, garages, basements, workbenches, utility rooms, storage rooms, barns, equipment rooms, auto shops, replacing fluorescent fixtures.

- 3CCT: One fixture 3 color temp (3500K,4000K,5000K)
- 3 wattage selectable
- Linkable, CCT & Watt switches both located on driver



3 CCT options and
3 Power options



LED WRAPAROUND LIGHT

Model	Color Temperature (CCT)	Power (W)	Input Voltage (V)	Dimmable	Dimensions (in)
PQ-LIWR4	CCTK = 3500K/4000K/5000K	35TW = 35 / 28 / 20 46TW = 46 / 38 / 30	UNIV = 120-347V	D = 0-10V	48"*5.2"*2.83"

Catalog Number for Example: PQ-LIWR4-CCTK-035TW-UNIV-D

CERTIFICATIONS




LED WRAPAROUND LIGHT

PQ-LIWR4


SPECIFICATIONS

Power	35W/28W/20W	46W/38W/30W
Input voltage	120-347V	
Lumens	4725LM	5980LM
Efficacy(lm/w)	130-140	
CRI	80	
Color Temperature(CCT)	3500K/ 4000K /5000K	
Lifetime(hours)	50,000	
Power Factor	0.99	
Housing	Plastic	
Mounting	Ceiling Mount or Cable Mount	
Humidity	20%-85% RH, non-condensing	
Operating temperature	-4°F to 122°F (-20°C to +50°C)	
Certifications	ETL, cETL, DLC 5.1 Premium / Standard, LM-79, LM-80(LED)	
Warranty	5 years	

DIMENSIONS (UNIT: MM)

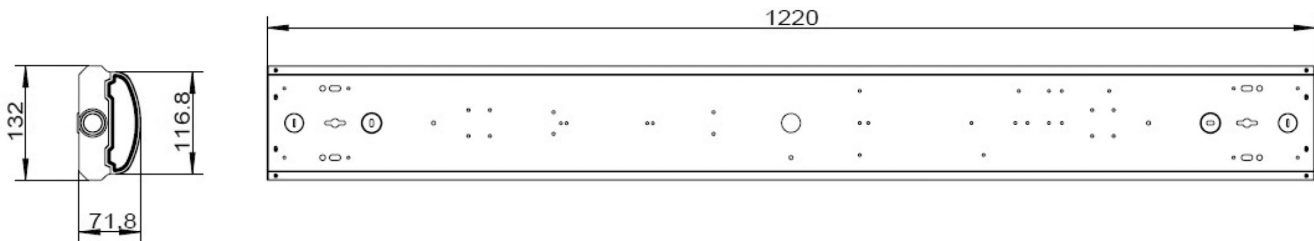

L: 1220 x W: 132 x H: 71.8

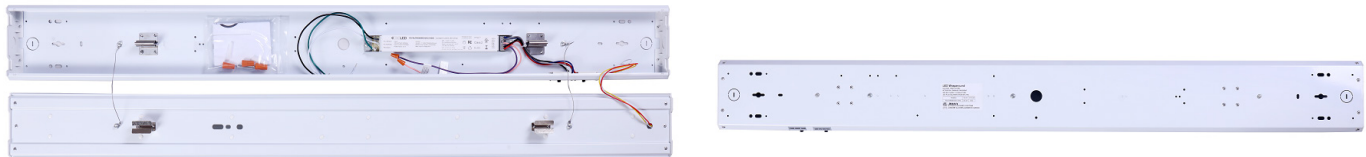

MOTION SENSOR



Built-in motion sensor

12V Only (suit for 120-347V driver)

4m Height Max