


# LED WRAPAROUND LIGHT

## PQ-LIWR4

### Tunable wattage and tunable CCT

Our LED wraparound light fixtures are perfect for offices, garages, basements, workbenches, utility rooms, storage rooms, barns, equipment rooms, auto shops, replacing fluorescent fixtures.

3 CCT (3500K/4000K/5000K) and 3 power (22W/32W/42W) options in one model.

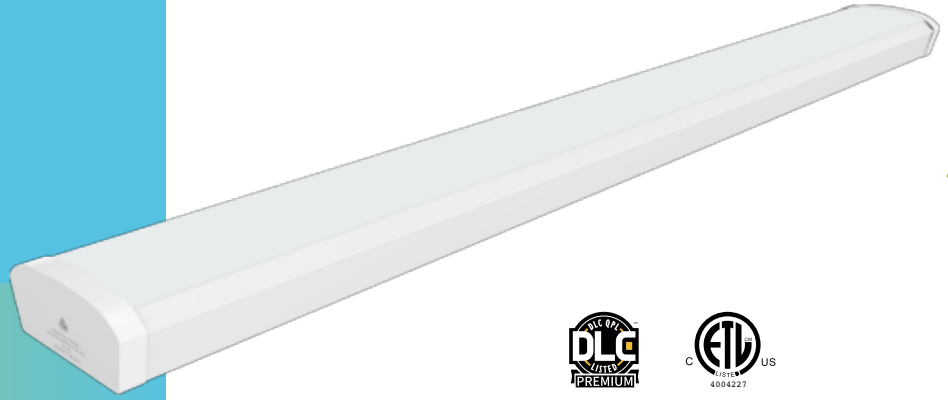

### 3 CCT options and 3 power options



#### SPECIFICATIONS

|            |  |                       |                              |
|------------|--|-----------------------|------------------------------|
| Dimensions | 120.5 x 13 x 4.8 cm<br>(47.5 x 5.1 x 1.9 inches) | Surge protection      | 2KV                          |
| Voltage    | Universal  | Power factor          | ≥0.9                         |
| Power      | 22W/32W/42W Tunable                              | Flicker free          | Option                       |
| Efficacy   | 130 lm/W   | Lifespan              | L70 – ≥50000<br>L90 – ≥46000 |
| Lumens     | 22W – 2860 lm<br>32W – 4160 lm<br>42W – 5460 lm  | Warranty              | 5 years                      |
| Dimming    | Continuous dimming to 10% or below               | Startup time          | ≤1S                          |
| CCT        | 3500K / 4000K / 5000K Tunable                    | Operating temperature | -20°~45°C (-4°~113°F)        |
| Beam Angle | 120°   | Housing               | Steel                        |
| Ra         | >80  | Optical lens          | PC Frosted/Clear             |
| THD        | ≤20%   | IP level              | IP22                         |

PQ-LIWR4-CCTK-042TW-UNIV-D  
Add CL or FR for clear or frosted lens

#### DIMENSIONS



L x W x H  
120.5 x 13 x 4.8 cm  
(47.5 x 5.1 x 1.9 inches)

# LED WRAPAROUND LIGHT

PQ-LIWR4

## INSTALLATION GUIDE

### A: Surface mount



### B: Suspension

