


RECESSED LED LINEAR LIGHT

PQ-LISP / PQ-LISPL

- A minimalist and clean design providing superior lighting quality.
- Ideal for commercial or architectural environments.

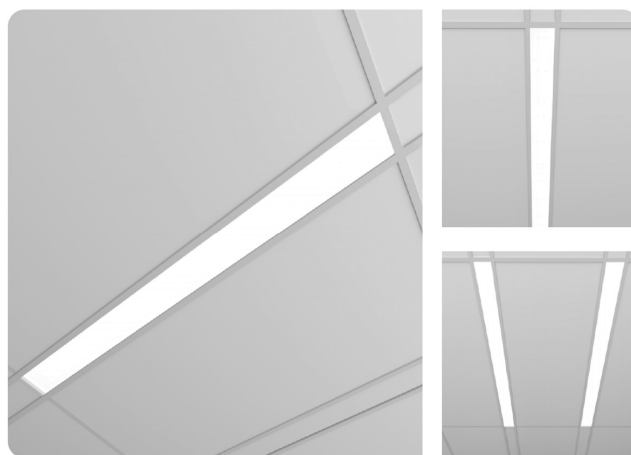

WET
LOCATIONS IP54



DIMMABLE



RECESSED LED LINEAR LIGHT

Model	Color temperature (cct)	Power (TW)	input voltage (v)	Finish	Dimmable	Mounting	Dimensions	Width (inches)
PQ-LISP	CCTK = 3000K/ 3500K / 4000K 5000 K	025TW= 10/15/20/25	UNIV = 120-347VAC	BL = White NR = Black GR = Gray	D = 0-10V	RL = Borderless	2pi = 2 feet	2,2in
		050TW= 35/40/45/50					4pi = 4 feet	
PQ-LISPL		025TW= 10/15/20/25				F = Surface Frame	2pi = 2 feet	3,45in
		050TW= 35/40/45/50					4pi = 4 feet	

Example catalog number: PQ-LISPL-CCTK-040TW-UNIV-NR-D-RL-4PI-3,45IN


CERTIFICATIONS




RECESSED LED LINEAR LIGHT

PQ-LISP-LISPL


SPECIFICATIONS			
Adjustable wattage (tw)	25 = 25/20/15/10	40 = 40/35/30/25	50 = 50/45/40/35
Input voltage (v)	120-347		
Efficiency (lm/w)	130 Lm/W		
Adjustable color temperature (cct)	3000K / 3500K / 4000K / 5000K		
Dimmable	0-10V		
Finish	White BL / Black NR / Gray GR		
Width dimensions (inches)	2,2"	3,45"	
Height (inches)	3"	3.45"	
Certifications	cETLus, FCC		
Warranty	5 years		




Recessed



3000K/3500K/4000K/5000K



Extruded aluminum body




clip mounting on frosted acrylic lens

RECESSED LED LINEAR LIGHT


PQ-LISP-LISPL

DIMENSIONS


LISP - 2 Feet

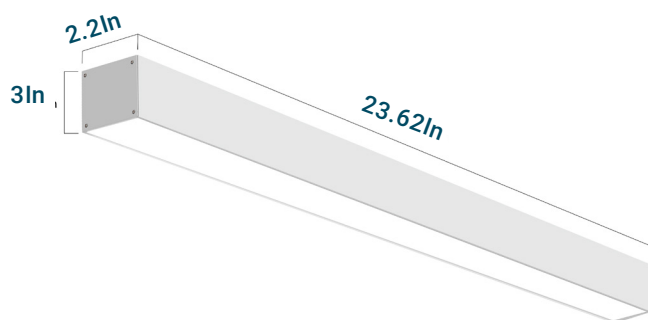


LISPL - 2 Feet

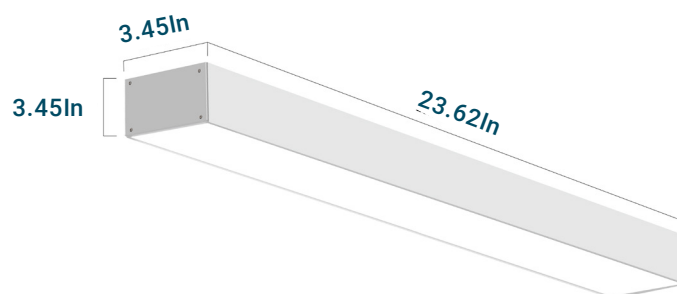

LISP - 4 Feet

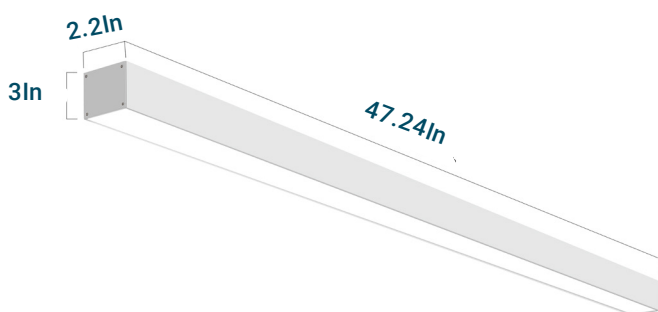


LISPL - 4 Feet

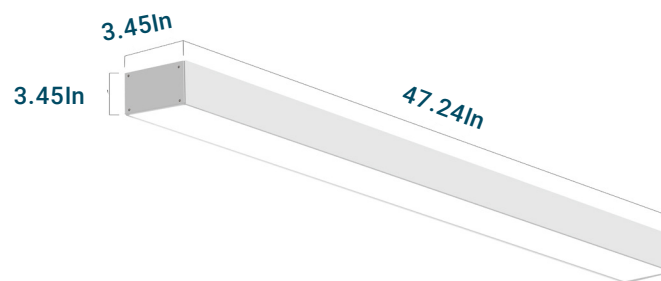


RECESSED LED LINEAR LIGHT

PQ-LISP-LISPL

INSTALLATION

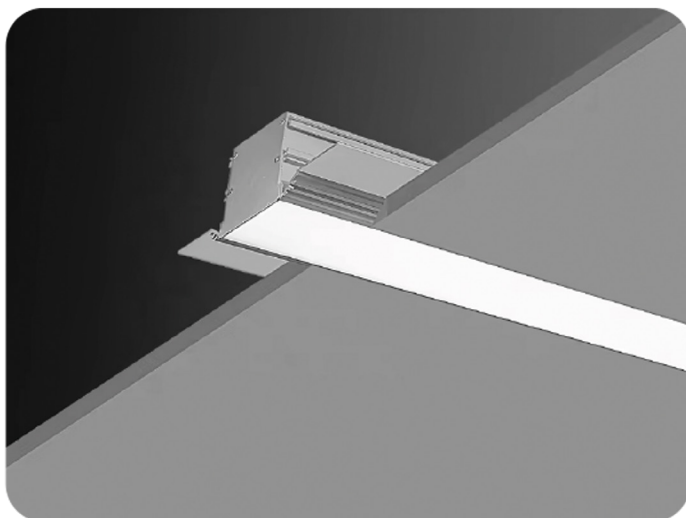

Borderless = RL

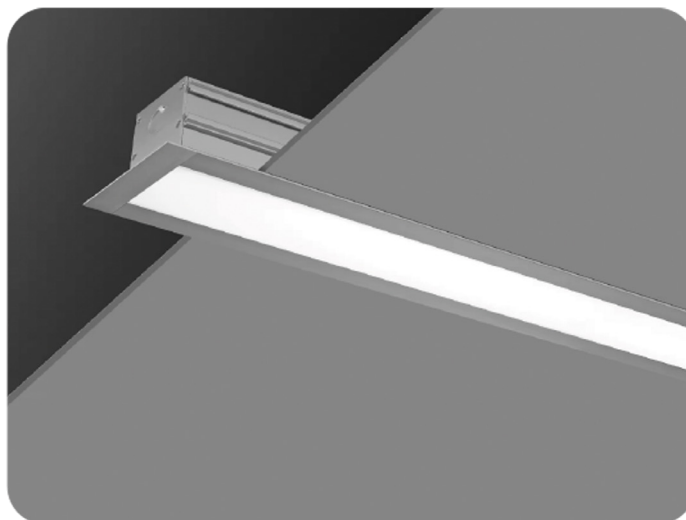

Framing = F

APPLICATION

