


# RECESSED LED LINEAR LIGHT

## PQ-LISP / PQ-LISPL

- A minimalist and clean design providing superior lighting quality.
- Ideal for commercial or architectural environments.

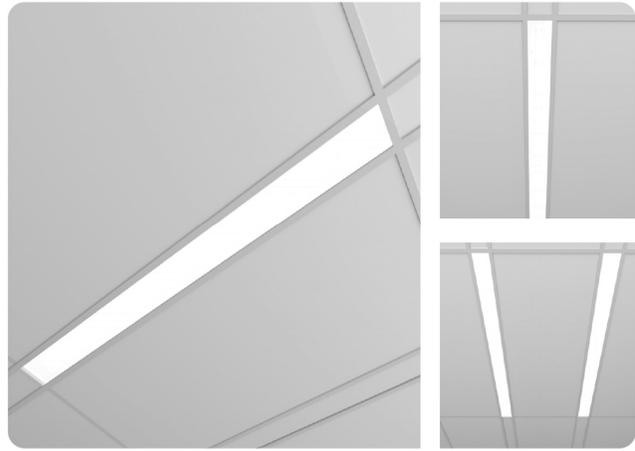

### RECESSED LED LINEAR LIGHT

Model	Color temperature (cct)	Power (TW)	input voltage (v)	Finish	Dimmable	Mounting	Dimensions	Width (inches)
PQ-LISP	CCTK = 3000K/ 3500K / 4000K 5000 K	025TW= 10/15/20/25	UNIV = 120-347VAC	BL = White NR = Black GR = Gray	D = 0-10V	RL = Borderless  F = Surface Frame	2pi = 2 feet	2,2in
		040TW= 25/30/35/40					4pi = 4 feet	
		050TW= 35/40/45/50					4pi = 4 feet	
PQ-LISPL		025TW= 10/15/20/25					2pi = 2 feet	3,45in
		040TW= 25/30/35/40					4pi = 4 feet	
		050TW= 35/40/45/50						

Example catalog number: PQ-LISPL-CCTK-040TW-UNIV-NR-D-RL-4PI-3,45IN


#### CERTIFICATIONS




# RECESSED LED LINEAR LIGHT

PQ-LISP-LISPL


SPECIFICATIONS			
Adjustable wattage (tw)	25 = 25/20/15/10	40 = 40/35/30/25	50 = 50/45/40/35
Input voltage (v)	120-347		
Efficiency (lm/w)	130 Lm/W		
Adjustable color temperature (cct)	3000K / 3500K / 4000K / 5000K		
Dimmable	0-10V		
Finish	White / Black / Gray		
Width dimensions (inches)	2,2" 3,45"		
Height (inches)	3"      3.45"		
Certifications	cETLus, FCC		
Warranty	5 years		



Recessed



3000K/3500K/4000K/5000K



Extruded aluminum body




clip mounting on frosted acrylic lens

# RECESSED LED LINEAR LIGHT


PQ-LISP-LISPL

## DIMENSIONS


### LISP - 2 Feet

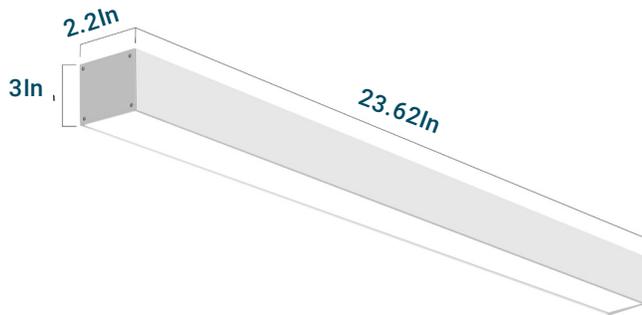


### LISPL - 2 Feet

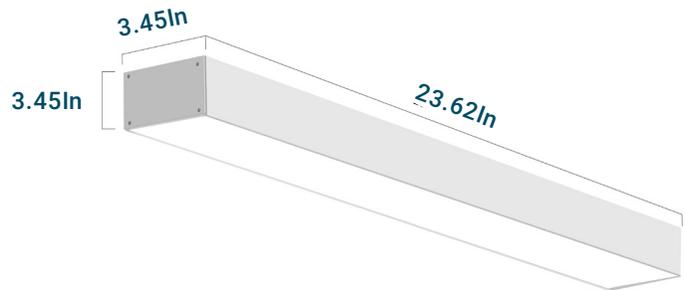

### LISP - 4 Feet

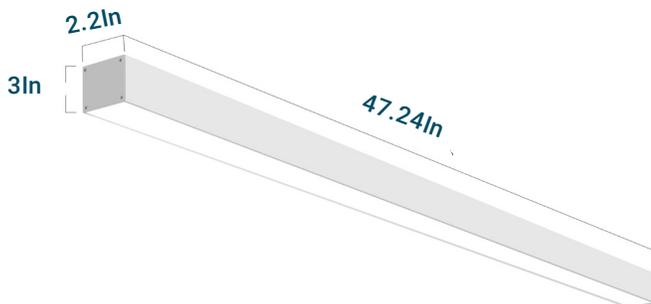


### LISPL - 4 Feet

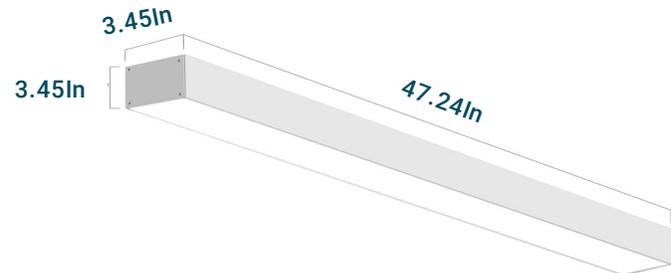


# RECESSED LED LINEAR LIGHT

PQ-LISP-LISPL

## INSTALLATION

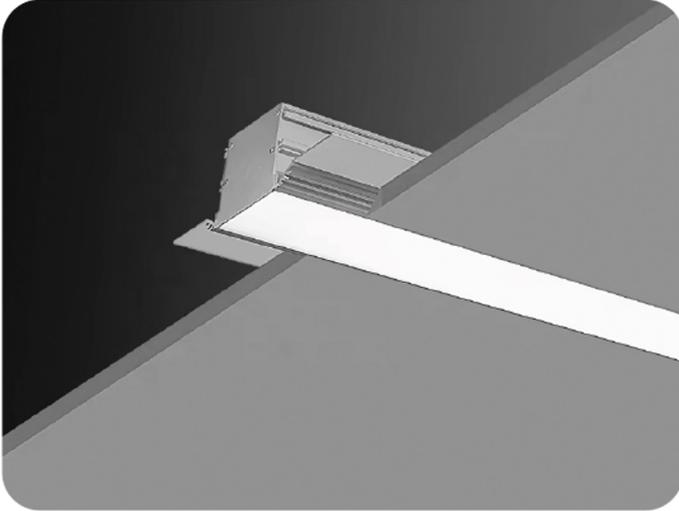

**Borderless**

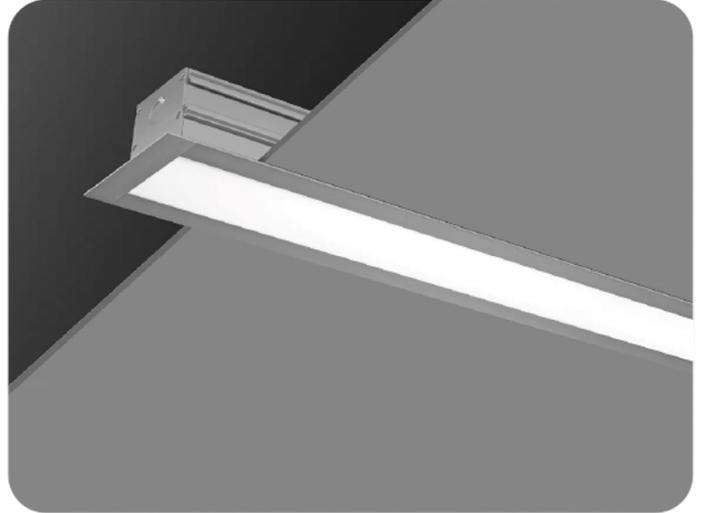

**Framing**

## APPLICATION

