




LED LINEAR LIGHTING

PQ-LISZ

LISZ is professionally and simply designed with slim and clean appearance, which can easily elevate your space by creating your own customized lighting design. It can run seamlessly easily at any length in a straight line or any modeling design by DIY connectors.

Ideal for using in offices, conference rooms, hallways, educational facilities and more.

- Seamless continuous run up to 600W
- Watt & CCT Selectable
- Adjustable Light Distribution
- 4 IN 1 installations: Suspension/Recessed/Surface/Wall Mount

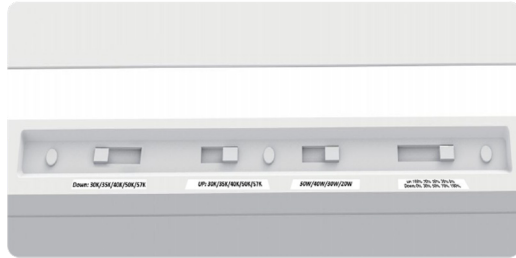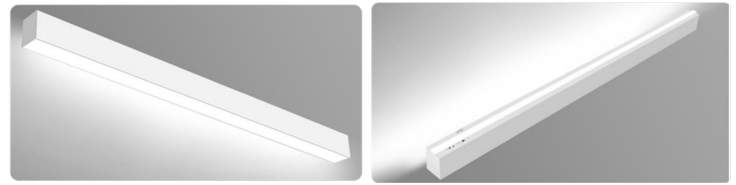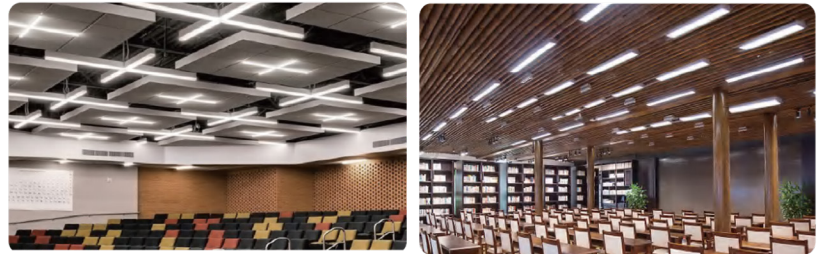

CCT
Ajustable

Selectable
WATTAGE

LED LINEAR LIGHTING

MODEL	SELECTABLE WATTAGE (W)	CCT AJUSTABLE	INPUT VOLTAGE	FINISH	OPTIONS	LENGTH	OPERATING MODE
PQ-LISZ	25TW = 25/20/15/10	CCTK = 3000K / 3500K / 4000K / 5000K / 5700K	UNIV = 120-347V	BL = White NR = Black or Customized	D = Dimmable	002P = 2 Feet	Uplight / Downlight Selectable
	35TW = 35/30/25/20					003P = 3 Feet	
	50TW = 50/45/40/35					004P = 4 Feet	
	100TW = 100/90/75/60					008P = 8 Feet	

CERTIFICATIONS



LED LINEAR LIGHTING

PQ-LISZ


SPECIFICATIONS				
Models	2 Feet	3 Feet	4 Feet	8 Feet
Input Voltage	120-347V			
Power Tunable (W)	25/20/15/10	35/30/25/20	50/45/40/35	100/90/75/60
Color Temperature Adjustable CCT	3000K / 3500K / 4000K / 5000K / 5700K			
LPW	130 Lm/w			
Lumen	3250lm	4550lm	6500lm	13000lm
Dimmable	0-10V			
CRI	83+			
Linkable Watt (Max.)	600W (Regular)			
Operating Mode	Uplight/Downlight Selectable			
Dimensions (in)	23.62"x2.2"x3"	35.43"x2.2"x3"	47.24"x2.2"x3"	94.48"x2.2"x3"
Finish	White, Black or Customized			
Certifications	cETLus, FCC, DLC, Energy Star, CE, SAA, ROHS			
Warranty	5 years			

ADJUSTABLE LIGHT DISTRIBUTION	
1	UP: 100% & DOWN: 0%
2	UP: 70% & DOWN: 30%
3	UP: 50% & DOWN: 50%
4	UP: 30% & DOWN: 70%
5	UP:0% & DOWN: 100%


LED LINEAR LIGHTING

PQ-LISZ

LISZ IN DEPTH

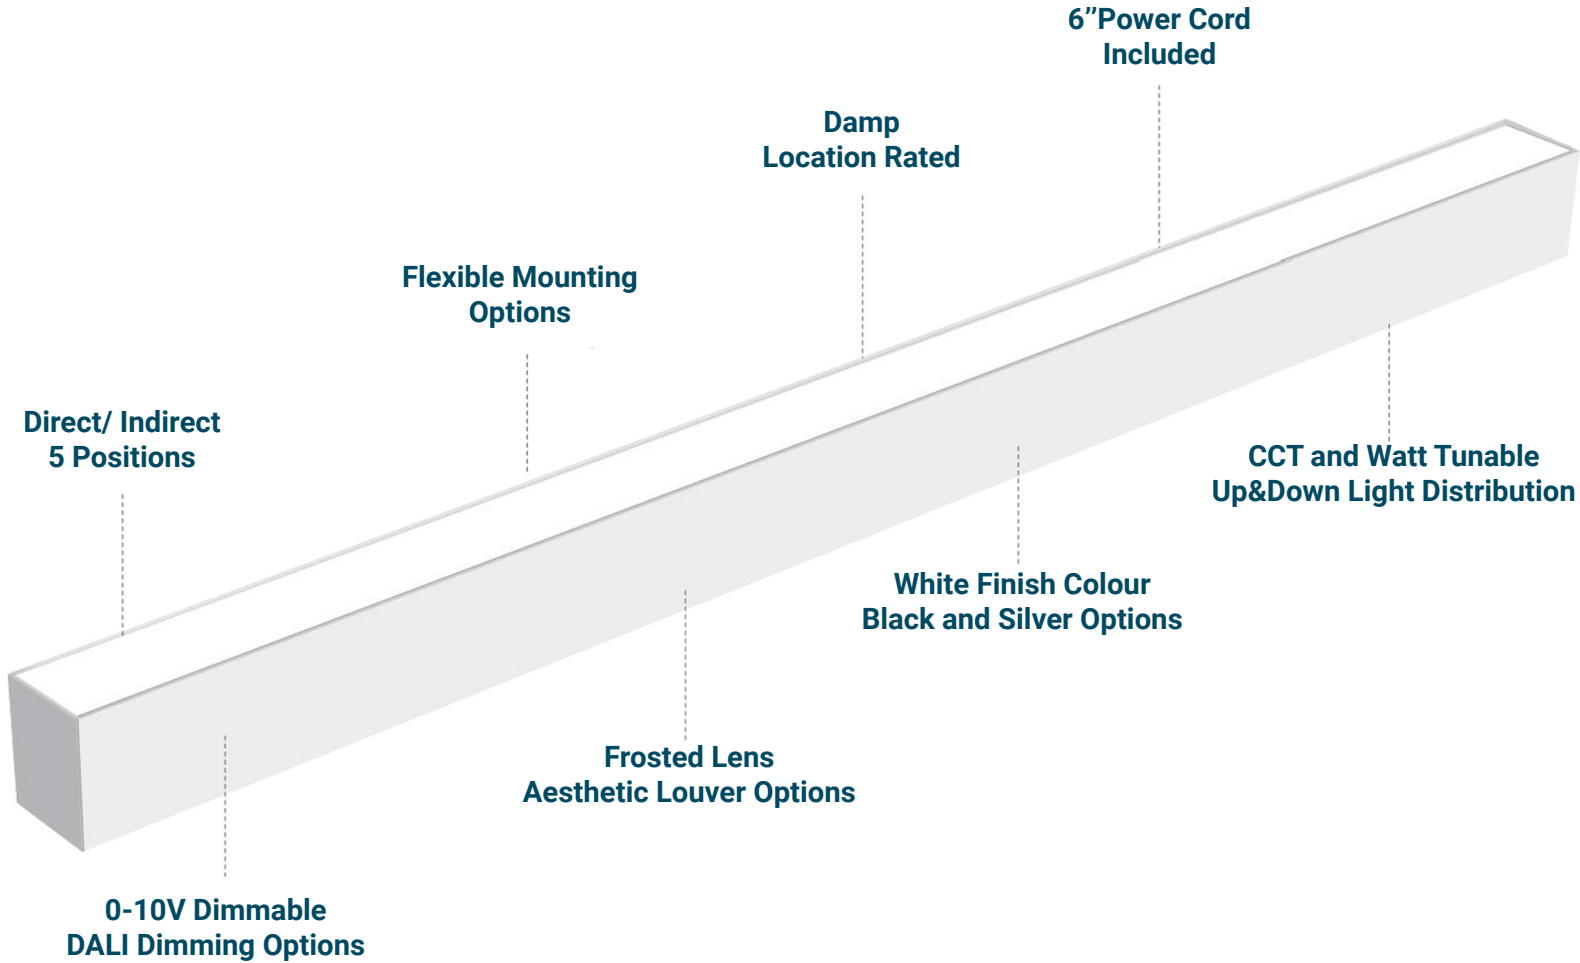

DIP SWITCHES FOR WATT/CCT/UP&DOWN LIGHT DISTRIBUTION

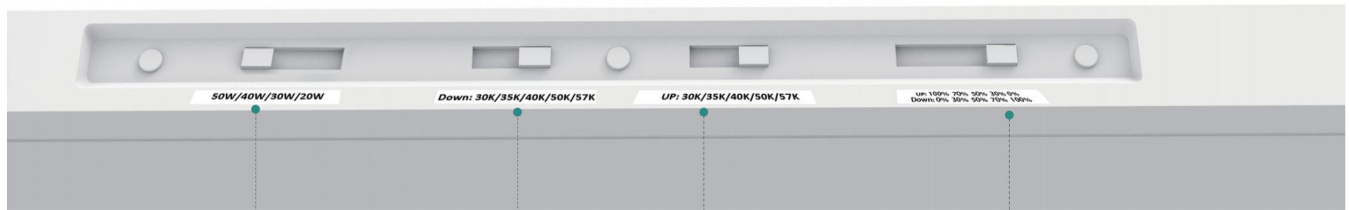

CCT Selectable
 30K/35K/40K/50K/57K(preset at 50K)
 35K/40K/50K(preset at 50K)

Watt Selectable
 2FT: 25W 20W 15W 10W(preset at 25W)
 3FT: 35W 30W 25W 20W(preset at 35W)
 4FT: 50W 45W 40W 35W(preset at 50W)
 8FT: 100W 90W 75W 60W(preset at 100W)


Up&Down Light Distribution

LED LINEAR LIGHTING


PQ-LISZ

DIMENSIONS

2FT




W: 2.2"





3FT




4FT




8FT

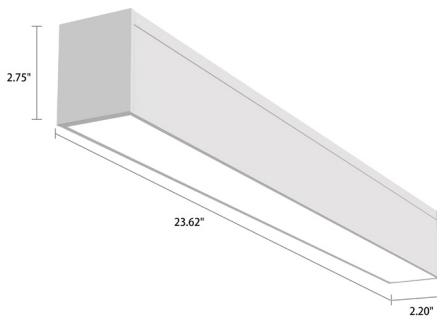


2 FEET

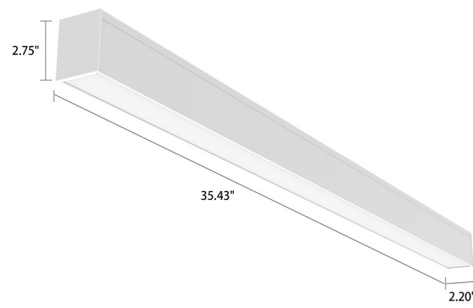

3 FEET

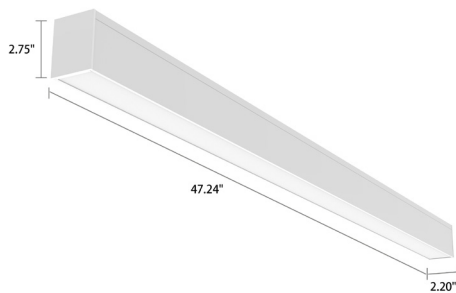

4 FEET

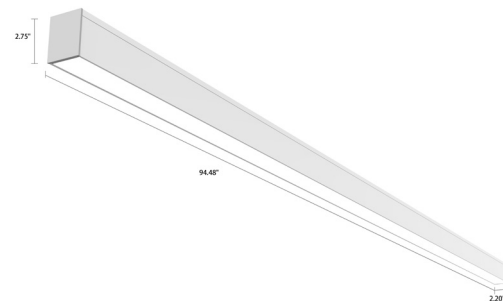


8 FEET

LED LINEAR LIGHTING

PQ-LISZ

PHOTOMETRY

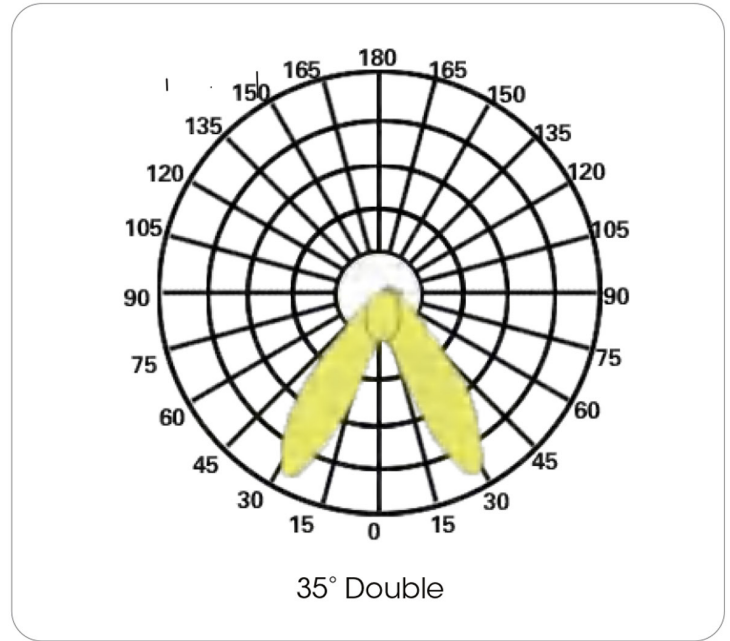

INSTRUCTIONS FOR ORDERING WITH PREFERRED DIMENSIONS

Catalog Number for Example: PQ-LISZ-CCTK-050TW-UNIV-BL-D-004P

LED LINEAR LIGHTING						
MODEL	SELECTABLE WATTAGE (W)	CCT AJUSTABLE	INPUT VOLTAGE	FINISH	OPTIONS	LENGTH
PQ-LISZ	25TW = 25/20/15/10	CCTK = 3000K / 3500K / 4000K / 5000K / 5700K	UNIV = 120-347V	BL = White NR = Black or Customized	D = Dimmable	002P = 2 Feet
	35TW = 35/30/25/20					003P = 3 Feet
	50TW = 50/45/40/35					004P = 4 Feet
	100TW = 100/90/75/60					008P = 8 Feet

If you have specific technology or service needs, it's highly recommended that you get in touch with Power-Q's experts. They can provide tailored solutions and guidance based on your specific requirements.

EMAIL: info@power-q.ca

PHONE: 514 667-6810


LED LINEAR LIGHTING

PQ-LISZ

OPTIONAL AESTHETIC LOUVERS



◦ **Wealth**

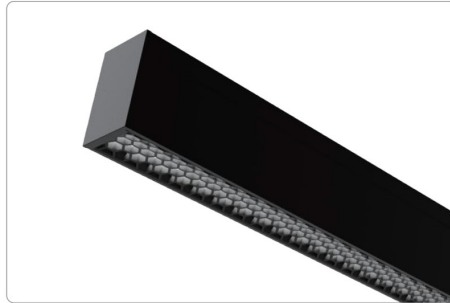

◦ **Honeycomb**



◦ **Grille**



◦ **Micro-Prismatic**



◦ **Concave**



◦ **Symmetrical Lens**

ACCESSORIES FOR UP&DOWN ARCHITECTURAL LIGHT

◦ Standard Accessories



Surface Mount



**M3*20 self-tapping
screw*4**




Plastic anchor*4

LED LINEAR LIGHTING



PQ-LISZ

OPTIONAL ACCESSORIES


- L, T and X shaped fixture, with selectable Wattages, CCTs and Up&Down Light Distribution





**L Shape 90deg
40W**

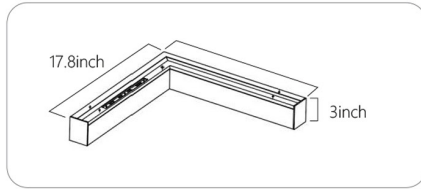


**L Shape 120deg
40W**

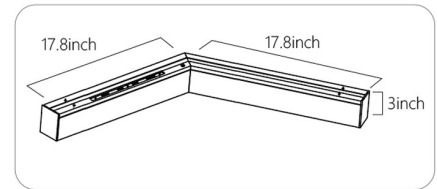


**T Shape
60W**

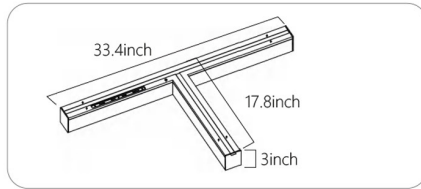

**X Shape
80W**

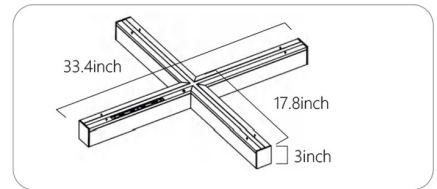

- DIP Switches Guide

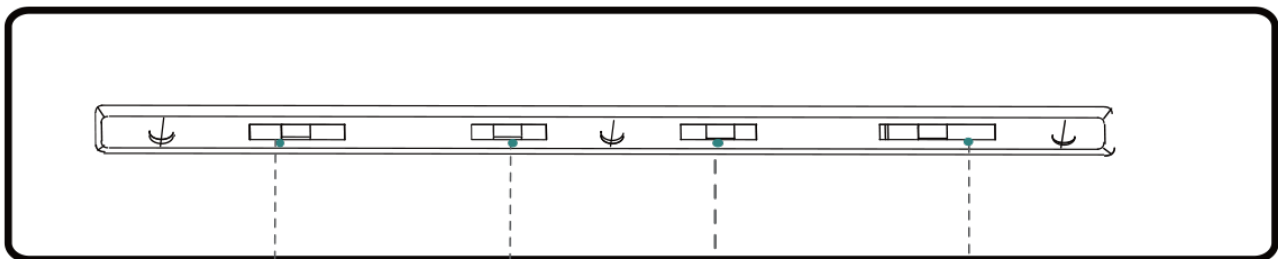

CCT Selectable
30K/35K/40K/50K/57K (preset at 50K)
35K/40K/50K (preset at 50K)

Watt Selectable
L(90deg): 40W 35W 30W 25W (preset at 40w)
L(120deg): 40W 35W 30W 25W (preset at 40w)
T: 60W 55W 50W 45W (preset at 60W)
X: 80W 75W 70W 65W (preset at 80W)

Up&Down Light Distribution
1 Up: 100% & Down: 0%
2 Up: 70% & Down: 30%
3 Up: 50% & Down: 50%
4 Up: 30% & Down: 70% (preset)
5 Up: 0% & Down: 100%




LED LINEAR LIGHTING

PQ-LISZ

• Wall Mount Bracket



2ft

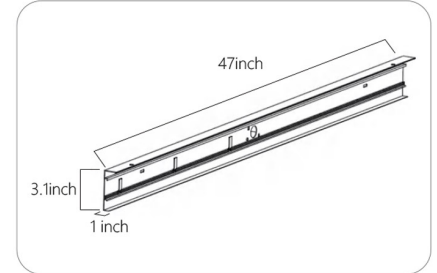
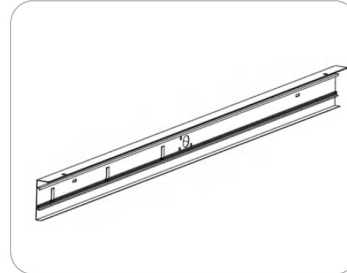
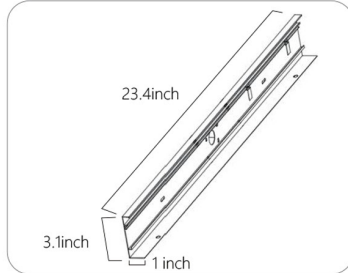


4ft*1pc. 2pcs of 4ft can be converted to 8ft

• Frame Recessed Mount






2ft

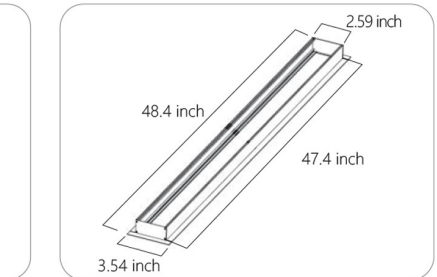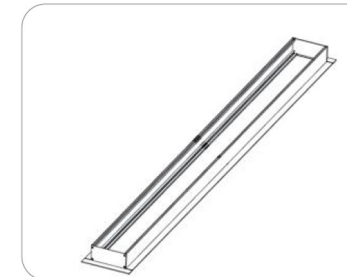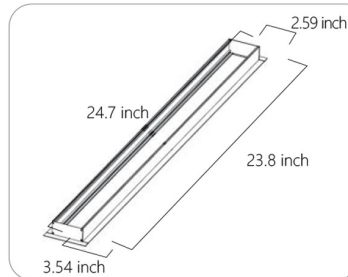

4ft*1pc. 2pcs of 4ft can be converted to 8ft


• Frameless Recessed Mount

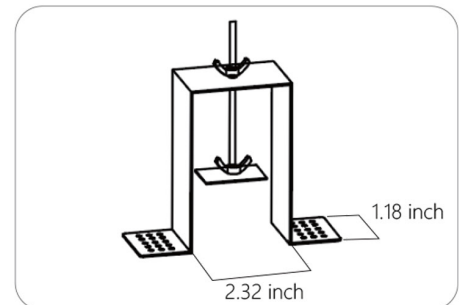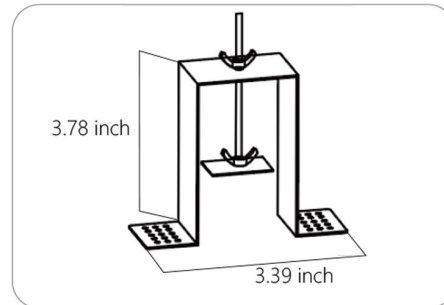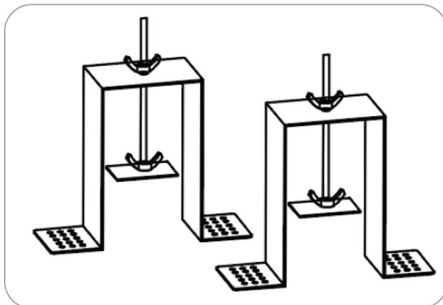

LED LINEAR LIGHTING

PQ-LISZ


◦ Suspension Mount

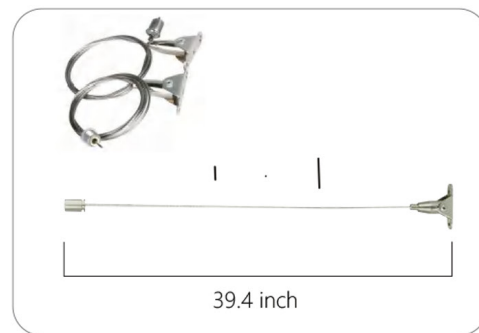

◦ Cuttable PC Cover



◦ Continuous Run Kit

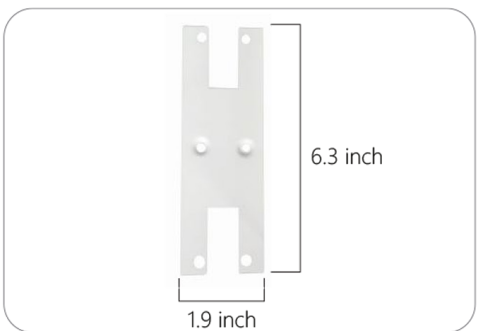

LED LINEAR LIGHTING

PQ-LISZ

APPLICATIONS

