

LED POST TOP LIGHT

PQ-GL4

- Integrated heat sink design, die-casting aluminum.
- Ra>80, LM80 standard, 150lm/w.
- IP65 waterproof.
- Application large outdoor areas such as lots, corporate parks, and retail setting, courtyard, garden, park, residential area, villa, square, sidewalk.



MODEL	COLOR TEMPERATURE	POWER	INPUT VOLTAGE
PQ-GL4	027K = 2700K 031K = 3000K 041K = 4000K 051K = 5000K 061K = 6000K	080W 100W 150W 200W	UNIV = AC 100-347V

Example: PQ-GL4-051K-100W-UNIV

CERTIFICATIONS




LED POST TOP LIGHT

PQ-GL4


SPECIFICATIONS

Power	80W / 100W / 150W / 200W
Lumen	7500-30000lm
Input voltage	AC100-277V / AC 100-347V/ AC200-480V
CCT	2700K / 3000K / 4100K / 5000K / 5700K / 6500K
Beam angle	120°
Light source	3030 SMD
Luminous efficacy	150 lm/w
CRI	≥80
IP Rating	IP65
Color of product	Gray
Dimensions (mm)	600 x 377

DIMENSIONS

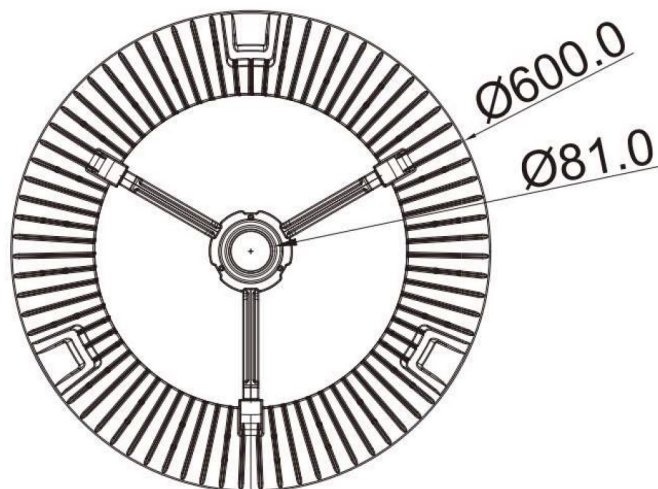

UNIT:mm

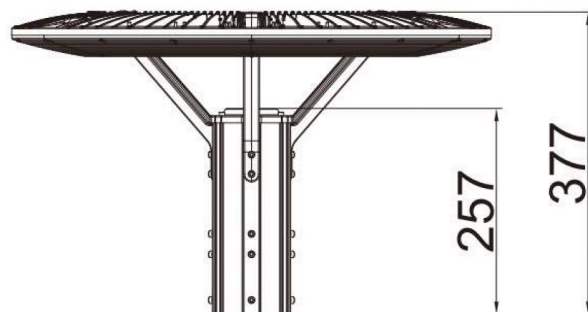

LED POST TOP LIGHT

PQ-GL4

INSTALLATION

- 1. Please turn off the power before operation.
- 2. LED lamp is extremely bright. To avoid possible damage to the eyes, do not stare into LED beam.
- 3. Please check the working voltage of product from the product label, do not exceed the working voltage range.
- 4. Input product line: brown or black is L, blue or white is N, yellow-green or green is GND.
- 5. Be sure wiring is closed and prevent leakage, when installing.
- 6. Please install and use the product under local fire regulations.

