

LED PROJECTOR LIGHT

PQ-VSP

1. The built-in breathing air valve ensures the lens is free of fog and moisture when there is temperature difference during use.
2. It is suitable for use in workshops, outdoor and other scenes.
3. Manually adjust the lens.
4. The signs can be customized.



400W



600W

LED PROJECTOR LIGHT

MODEL	Color Temperature (CCT)	Power (W)	Luminous Flux (Lm)	Beam Angle	Dimensions (mm)	Input voltage (V)
PQ-VSP	065K = 6500K	400W	48,000lm	015D = 15°	285*250*180	120V = AC85-265V
		600W	72,000lm	015D = 15° 030D = 30° 050D = 50°	400*252.6*252.6	

LED PROJECTEUR LIGHT

PQ-VSP

SPECIFICATIONS



Power (W)	400W	600W
Input Voltage (V)	85-265VAC	
LEDs	OSRAM	
Color Temperature (CCT)	6500K	
Rendering Index	80+	
Luminous Flux	48000lm	72000lm
Reflector Angle	15°	15° / 30° / 50°
Power Factor	0.95	
Lifepan	≥30000 hrs	
Working Temp	-30 to +55°C	
Housing Material	Aluminum Alloy	
Housing Color	Black	
Installation	Mounting bracket	
Installation Height	35ft	53ft
Protection Grade	IEC61000-4 (Level4)	
Dimensions	285*250*180 mm	400*252.6*252.6 mm
Weight	11.2kg	10.7kg

LED PROJECTEUR LIGHT

PQ-VSP

DIMENSIONS

Model: 400W

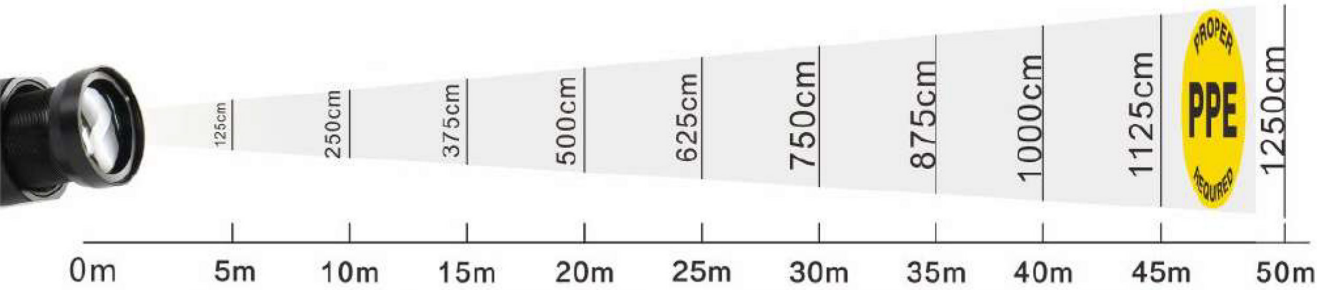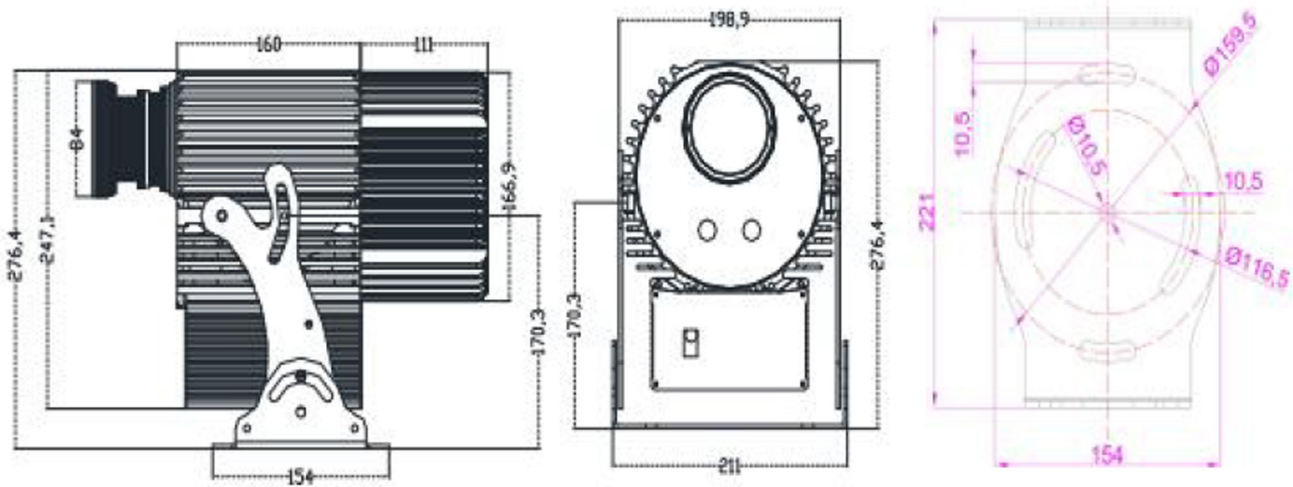







Illumination	lux	75100	21540	8500	5720	5720	1604
	height	2	4	6	8	10	13

LED PROJECTEUR LIGHT

PQ-VSP

DIMENSIONS

Model: 600W

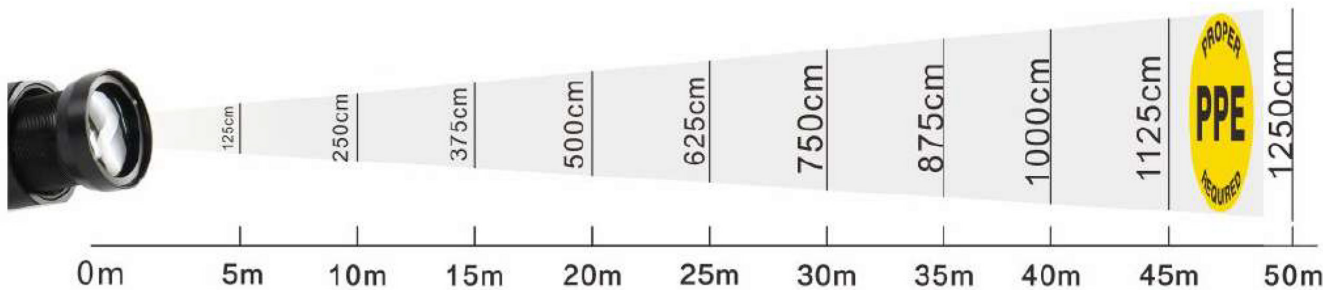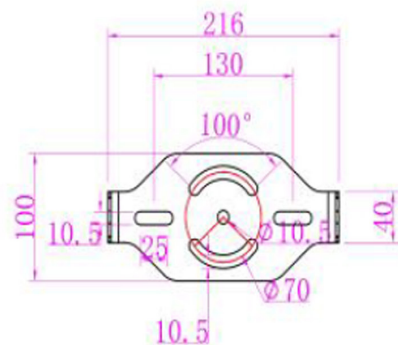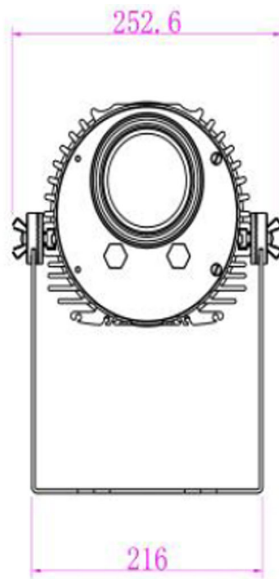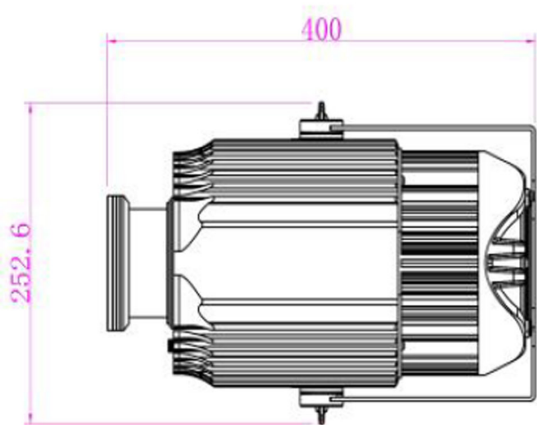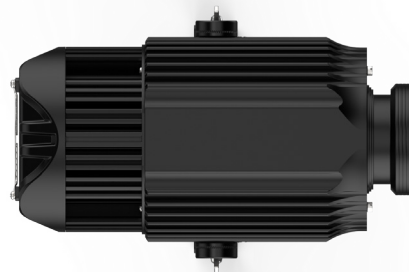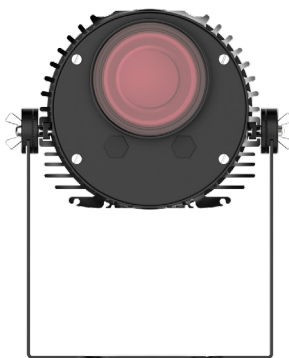

Illumination	lux	112650	32310	12750	8580	4710	2406
	height	2	4	6	8	10	13

LED PROJECTEUR LIGHT

PQ-VSP

APPLICATIONS



INSTRUCTIONS FOR ORDERING

MODEL	Color Temperature (CCT)	Power (W)	Input voltage (V)	Beam Angle
PQ-VSP	065K = 6500K	400W	120V = AC85-265V	015D = 15°
		600W		015D = 15° 030D = 30° 050D = 50°

Catalog Number for Example: PQ-VSP-065K-400W-120V-015D

If you have specific technology or service needs, it's highly recommended that you get in touch with Power-Q's experts. They can provide tailored solutions and guidance based on your specific requirements.

EMAIL: info@power-q.ca

PHONE: 514 667-6810