

# UFO HIGH BAY

## PQ-HBG

Available in three sizes, the HBG UFO high bay with the ability to switch lumens and adjust CCT in one fixture, making it versatile enough to handle countless applications.

- Power Selectable: 150TW, 200TW, 240TW & 320TW
- CCT: Selectable between 4000K & 5000K
- HBG provides 150lm/w (standard) and 170lm/w light efficacy options, which will assure the brightness meets the application and provides the amount of light you want and need for your area during install.
- Standard with 0-10V sensor port, for quick plug and play install sensor. The fixture is DLC LLLC listed also compatible with NLC system. Emergency battery backup is available.
- IP65 rated products, suitable for commercial and industrial: warehouses and storage, industrial facilities, retail centers, manufacturing, sports facilities and gymnasiums.



### UFO HIGH BAY

MODEL	Color Temperature (CCT)	Power Tunable (TW)	Luminous Flux (Lm)	Dimensions (mm) (W x H)	Input Voltage (V)
PQ-HBG	CCTK = 4000K/5000K	150TW = 150/100/80 200TW = 200/150/100 240TW = 240/200/150 320TW = 320/240/200	25,500lm 34,000lm 40,800lm 54,400lm	275 x 196 275 x 196 305 x 200 350 x 220	UNIV = 120-347 VAC

### CERTIFICATIONS



# UFO HIGH BAY

PQ-HBG




SPECIFICATIONS				
Models	150TW	200TW	240TW	320TW
Power Tunable (TW)	150/100/80	200/150/100	240/200/150	320/240/200
Input Voltage (V)	120-347VAC			
Frequency (Hz)	50-60			
Dimmable	0-10V			
Color Temperature	4000K, 5000K			
Beam Angle	60°, 90°, 120°			
Lumen per Watt	150L/w standard, 170L/w optional			
CRI	>80			
Cables	5ft (59") power cord 1ft (12") dimming cord			
Housing	Die-casing aluminum			
Color Finish	Black or White			
Operating temperature	-40°F (-40°C) to 122°F (50°C)			
Mounting	Standard with G hook & Safety rope 0.3m Optional: O hook, U bracket, and 3/4" NPS Threaded Pendant mount adapter are available.			
Sensor	Microwave or PIR (Optional)			
Certifications	cULus, DLC			
Warranty	5 years			

# UFO HIGH BAY




PQ-HBG

DIMENSIONS (IN MM & INCHES)




## SMALL SIZE - 150TW & 200TW

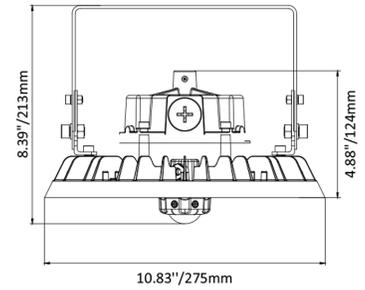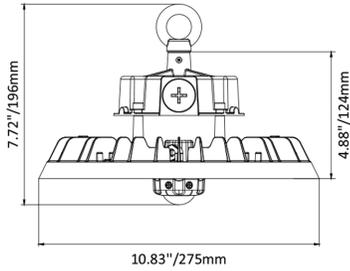

## MEDIUM SIZE - 240TW

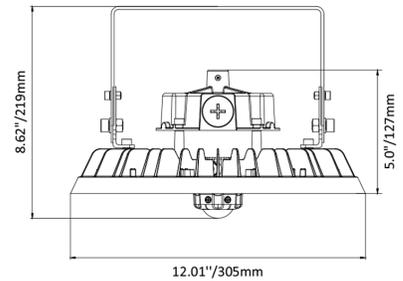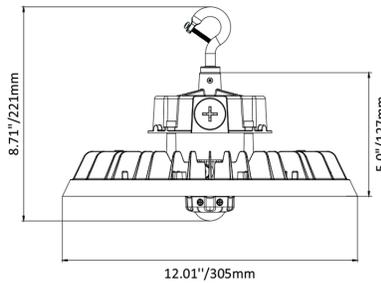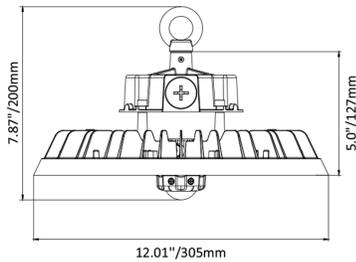

## LARGE SIZE - 320TW

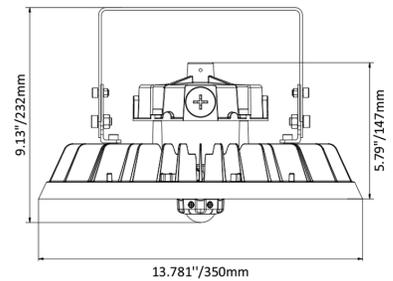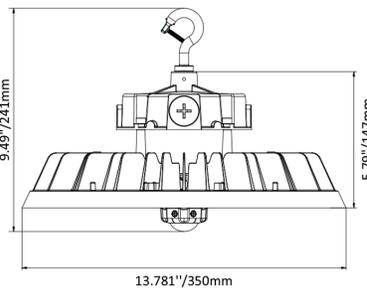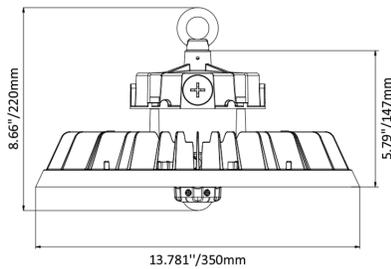

# UFO HIGH BAY

PQ-HBG



**SMALL SIZE - 150TW & 200TW**



**MEDIUM SIZE - 240TW**



**LARGE SIZE - 320TW**

# UFO HIGH BAY

PQ-HBG

## ORDERING GUIDE

MODEL	Color Temperature (CCT)	Power Tunable (TW)	Input Voltage (V)	Beam Angle	Housing Color	Options
<b>PQ-HBG</b>	CCTK = 4000K/5000K	150TW = 150/100/80 200TW = 200/150/100 240TW = 240/200/150 320TW = 320/240/200	UNIV = 120-347VAC	060D = 60° 090D = 90° 120D = 120°	NR = Black BL = White	SM = Microwave Sensor


**Catalog Number as an Example: PQ-HBG-CCTK-240TW-UNIV-120D-NR-SM**

If you have customized technology needs or specific services requirements, we strongly recommend contacting Power-Q's experts  
**EMAIL:** [info@power-q.ca](mailto:info@power-q.ca)  
**PHONE:** 514 667-6810


# UFO HIGH BAY

PQ-HBG


## PHOTOMETRY

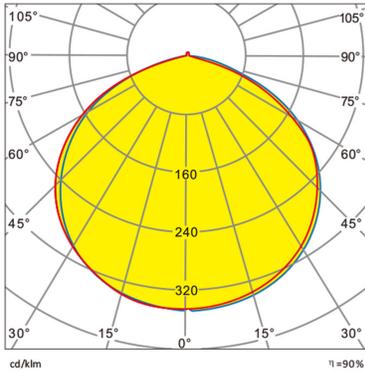

**120°**

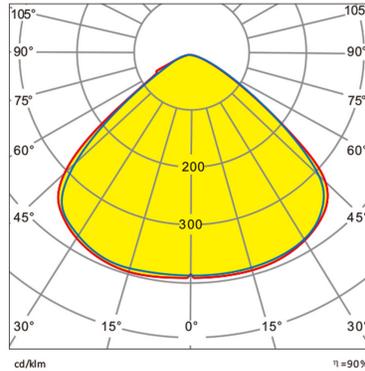

**90°**

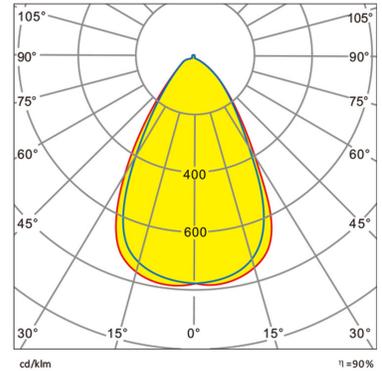

**60°**

## POWER SELECTION



### Power Setting

Adjust power between

**Small:**

150/100/80W, 150W default setting.  
200/150/100W, 200W default setting.

**Medium:**

240/200/150W, 240W default setting.

**Large:**

320/240/200W, 320W default setting.

### CCT Setting

Adjust CCT between

4000/5000K, 5000K default setting.

# UFO HIGH BAY

## PQ-HBG

### OPTIONAL ACCESSORIES

#### Sensor : Factory-Installable OR Field-Installable (field-installable purchased separately)

	SPIR = Passive Infrared Sensor <b>PQ-HBG Sensor-SPIR</b>
---	---

#### Field-Installable / Field-Use ONLY (purchased separately)

	Remote Control <b>PQ-HBG-BL-Remote</b>
---	---

#### Mounts and Brackets : Field-Installable (field-installable purchased separately)

	Small Size U Bracket <b>PQ-HBG-UB</b>		0.3m Safety Rope (Included) <b>PQ-HBG-SR</b>
	External Threads M10 to External Threads 3/4"NPS Adapter Wiring for 150TW to 240TW <b>PQ-HBG-M10-3/4NPS</b>		External Threads M12 to External Threads 3/4"NPS Adapter Wiring for 320TW only <b>PQ-HBG-M12-3/4NPS</b>
	0.5m Stainless Steel Hang Chains with 2pcs Carabiner <b>PQ-HBG-HC</b>		

#### Reflector : Field-Installable (field-installable purchased separately)

	Smaller Size (12.20x5.04") Polycarbonate Refractor <b>PQ-HBG-200TW-PR</b>		Smaller Size (12.20x6.14") Polycarbonate Refractor with Drop Lens <b>PQ-HBG-200TW-DL-PR</b>
	Small Size (16.22x5.91") Polycarbonate Refractor <b>PQ-HBG-240TW-PR</b>		Small Size (16.22x7.36") Polycarbonate Refractor with Drop Lens <b>PQ-HBG-240TW-DL-PR</b>
	Large Size (16.22x5.71") Polycarbonate Refractor <b>PQ-HBG-320TW-PR</b>		Large Size (16.22x7.17") Polycarbonate Refractor with Drop Lens <b>PQ-HBG-320TW-DL-PR</b>