

WALL PACK

PQ-WKTX2

The adjustable LED wall pack PQ-WKTX2 features a die-cast aluminum alloy heat sink. It can be adjusted from 0 to 90 degrees, allowing the lighting to be precisely directed. This is an ideal commercial outdoor luminaire for buildings and can easily replace any wall-mounted fixture.

Applications:

Building facades, commercial, industrial, retail, and hospitality buildings that require long lifespan and low maintenance. Any application where full cut off and semi-cut off wall-mounted lighting can be used.



8

10"



SPECIFICATIONS

Efficiency	150 lm/W (± 10 %)	IP Level	IP65
Light distribution	Type II	IK Level	IK08
Input voltage	120-347V	Finish	Black/Bronze
CCT	3000K/4000K/5000K	Housing	Die-cast aluminium
IRC	Ra > 70	Lens	Polycarbonate
Adjustable angle	0-90 °	Lifespan	L70 @ 50,000 hours
Total Harmonic Distortion (THD)	< 20 %	Operating temperature	-40° F – 122 F (-40°C – 50°C)
Surge protection	L-N: 2kV L/N-PE: 4kV	Photocell	Integrated
Additional function	0-10V dimming / Adjustable wattage / Adjustable CCT	Installation	Junction box
Certification	ETL/cETL/DLC Premium	Warranty	5 years
		Surge protector	6 KV

WALL PACK

Model	Color Temperature (CCT)	Power (W)	Input Voltage (V)	Colors
PQ-WKTX2	3CCTK= 3000K / 4000K / 5000K	040TW=15/20/30/40W	UNIV= 120-347VAC	NR = Black BR = Bronze
		080TW=40/50/60/80W		
		120TW=60/90/100/120W		

Catalog number (example): **PQ-WKTX2-3CCTK-040TW-UNIV-NR**

WALL PACK

PQ-WKTX2

FEATURES

0–90° adjustable beam angle

Die-cast aluminum housing
The robust housing ensures excellent heat dissipation.

Polycarbonate optical lens
Full cut-off wall pack compliant with DLC standards.


On-site adjustable color temperature (CCT)
3 selectable CCTs: 3000K / 4000K / 5000K

On/off photocell sensor

On-site adjustable wattage
4 selectable wattage settings

Integrated photocell sensor


0–90° adjustable beam angle, ideal for lighting specific areas

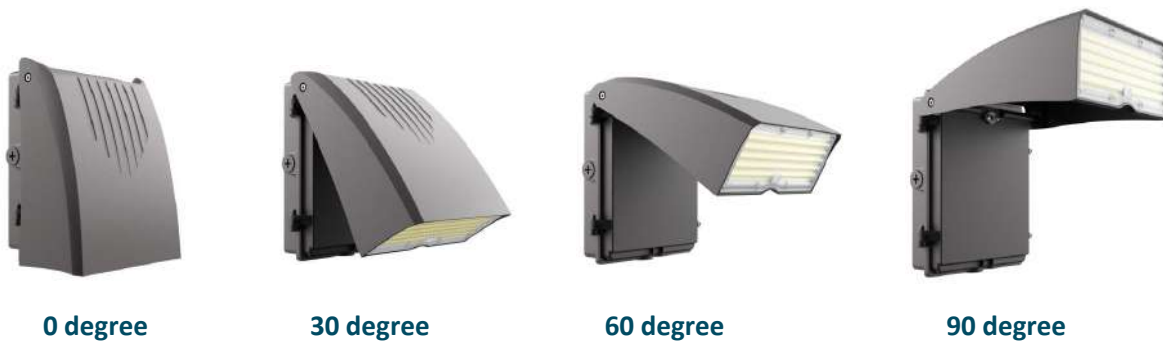


WALL PACK

PQ-WKTX2

DIMENSIONS

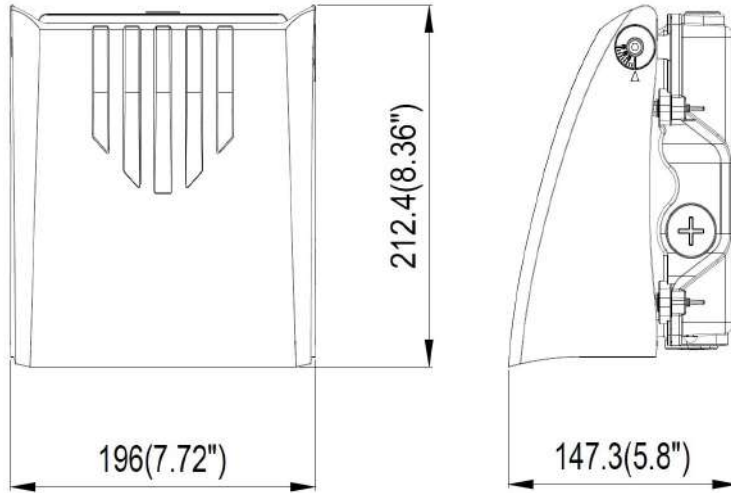

40TW, 80TW

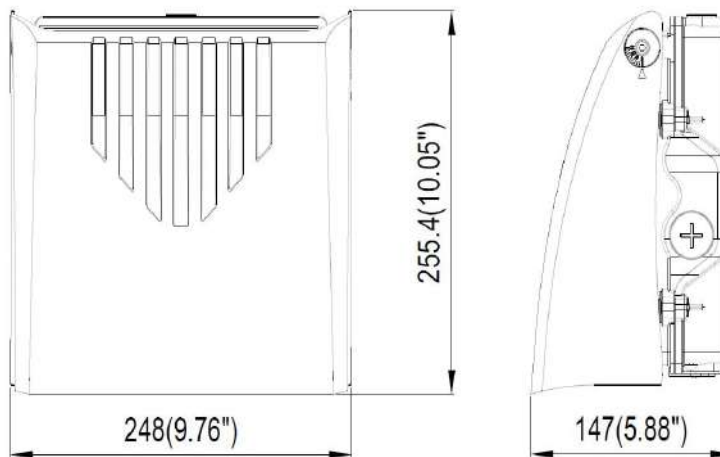

120TW