


BACKLIT LED PANEL

PQ-PNCB

- Power and CCT color tunable.
- Never turns yellow.
- Isolated driver.
- Super bright SMD2835 LEDs, 130LM/W.
- Non-flicker, no dark spot, protects your eyes
- Ideal replacement for traditional panel with over 80% energy saving.
- 5-year warranty.

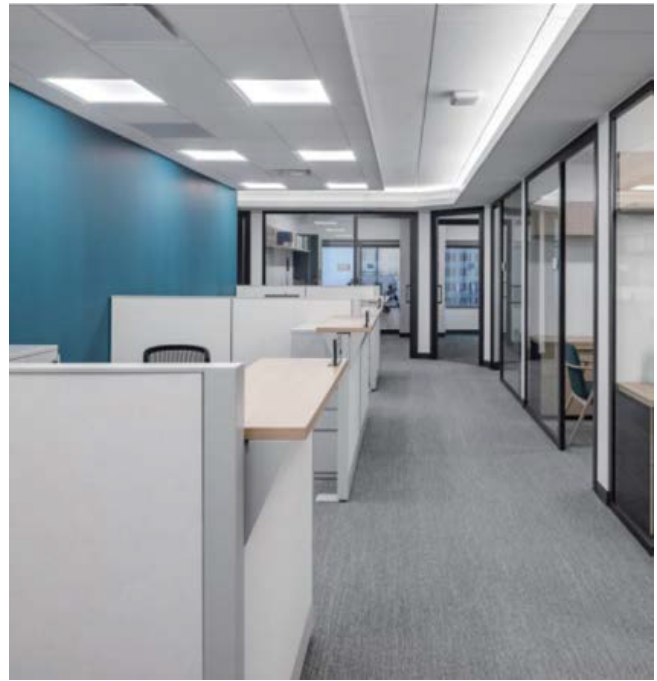

SPECIFICATIONS

Input voltage	AC100-347V	IP rating	IP40
CCT adjustable	3000K / 3500K / 4000K / 5000 / 6500K	Operating temperature	-30°C~40°C
LED source	SMD2385	Dimming	0-10V dimming
CRI	>80	Power factor	≥ 0.95
LM	LM80	Total harmonic distortion	<15%
Lumens	130 lm/w	Lifetime	54000h

CCT TUNABLE MODELS	POWER (WATTS)	SIZE (INCHES)	NET WT (LBS)
PQ-PNCB22-CCTK	20-25-30-35-40	24 x 24	5.07
PQ-PNCB14-CCTK	20-25-30-35-40	12 x 48	5.51
PQ-PNCB24-CCTK	30-40-50-60-72	24 x 48	9.26


MODEL	COLOR TEMPERATURE	POWER TUNABLE (WATTS)	INPUT VOLTAGE (V)	OPTIONS
PQ-PNCB22	CCTK = 3000K / 3500K / 4000K / 5000K / 6500K	40TW = 20/25/30/ 35/40	UNIV = 100-347VAC	S = Sensor D = Dimming (0-10V)
PQ-PNCB14				
PQ-PNCB24		72TW = 30/40/50/ 60/72		

Catalog Number for Example: PQ-PNCB22-CCTK-40TW-UNIV-D


BACKLIT LED PANEL

PQ-PNCB

FEATURES

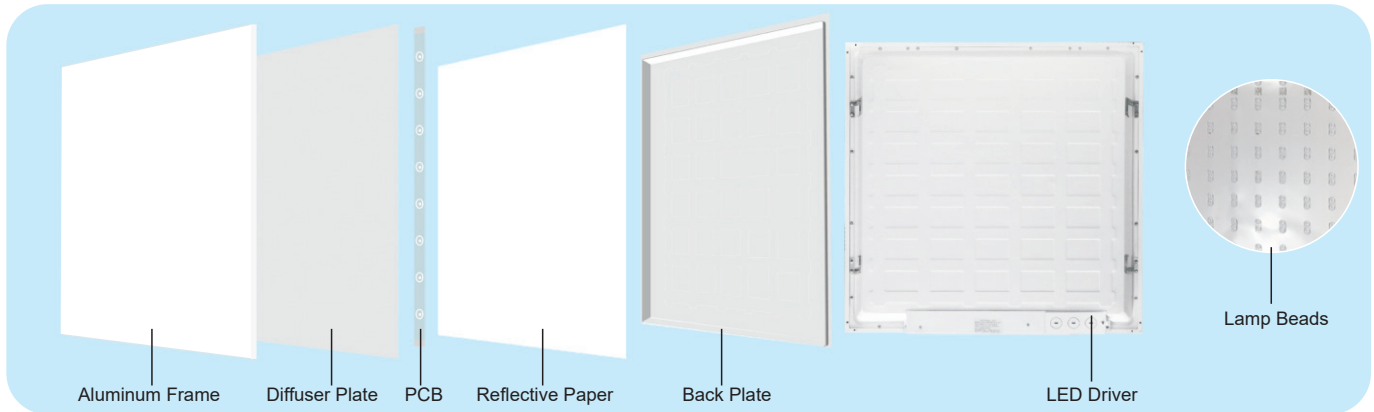

DIMENSIONS


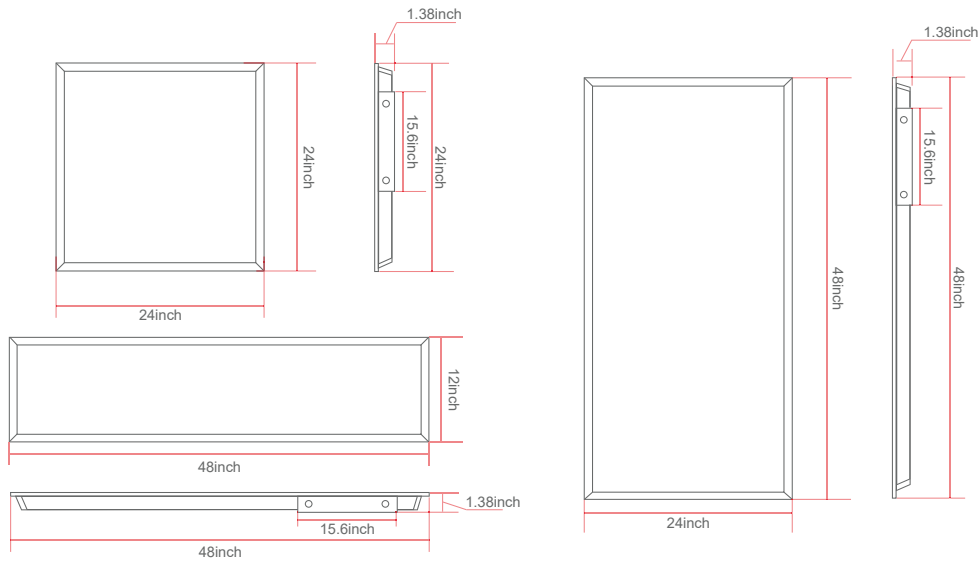


BACKLIT LED PANEL



PQ-PNCB

PHOTOMETRIC RESULTS



24X24PO,40W

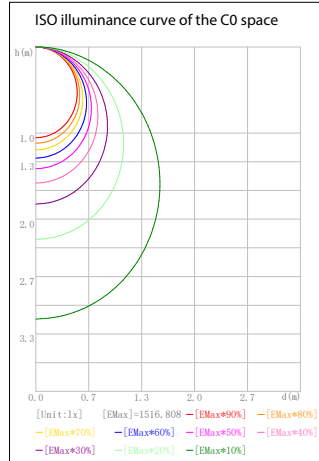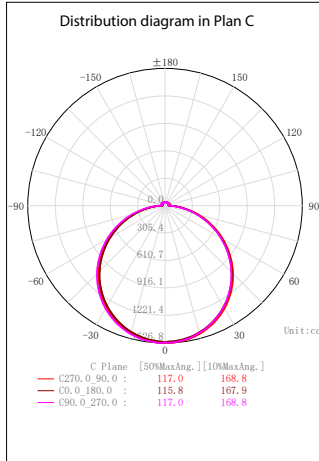

24X48PO,72W

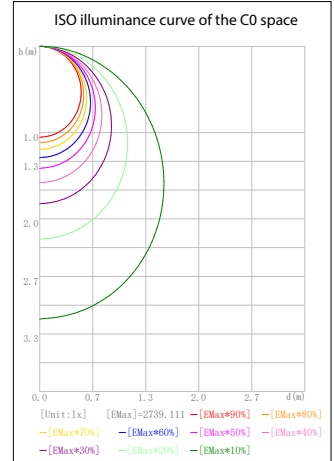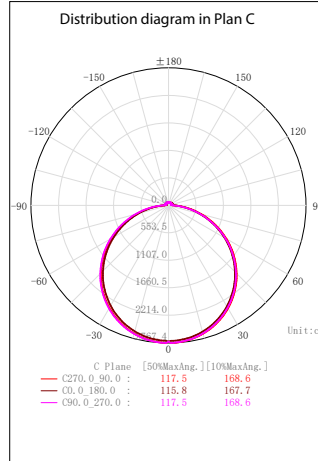

12X48PO,40W

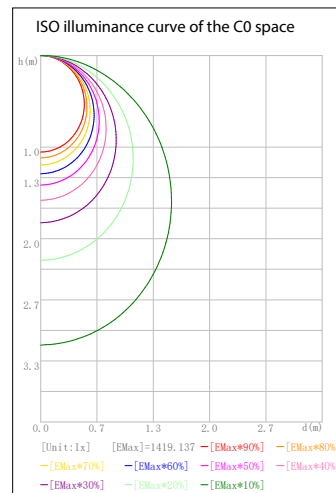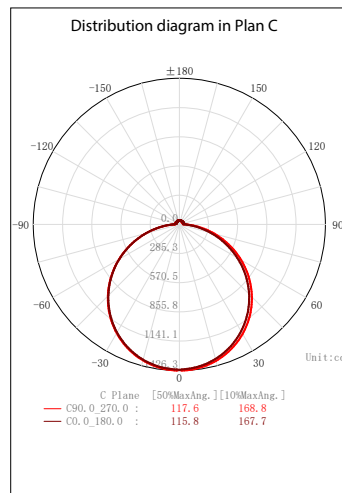

BACKLIT LED PANEL


PQ-PNCB

MOUNTING

- Suspended
- Recessed
- Surface mounted



Suspended



Recessed



Surface mounted

ACCESSORIES (Sold separately)



Surface mounting kit

PQ-PNSK 14 = 1X4
PQ-PNSK 24 = 2X4
PQ-PNSK 22 = 2X2



suspension kit

PQ-PN-HK