

LED DECORATIVE POST TOP LIGHT

PQ-GL6

- The Post Top Light features a sleek and sophisticated structure, seamlessly combining outdoor lighting functionality with architectural aesthetics.
- This light fixture offers multiple options for light distributions, mounts, and brackets, catering to diverse optical and installation requirements.
- Photocell and Motion sensor are also available.
- Its comfortable low-glare optical design makes it an ideal choice for parking lots, drive lanes, entrances, building perimeters, pathways and landscaping projects.



MODEL	Wattage	CCT	Input Voltage	Dist. Type	Finish	Photocell	Sensor	Mounting Brackets
PQ-GL6	125TW= 125/105/76W Selectable	CCTK= 2200/ 3000/ 4000k Note: CCTK Selectable	UNIV= 120-347 VAC	T2=Type2 T3=Type3 T4=Type4 T5=Type5	NR = Black color	Blank= Without Photocell P=With Photocell	Blank= Without Sensor S=Sensor	PT=Post Top Mount PA=Pole Mount Arm for round or square poles SM=Surface Mount WM=Wall Mount PD=3/4" NPS Pendant Mount
	063TW=63/53/ 33W Selectable Note: TW=Wattages Selectable				BL = White color BR = Dark Bronze GR = Grey			

Example: PQ-GL6-CCTK-063TW-UNIV-T5-GR-P-PT

CERTIFICATIONS



LED DECORATIVE POST TOP LIGHT

PQ-GL6

PRODUCT SPECIFICATIONS

Construction

- Rugged die-casting aluminum housing with a durable powder-coated finish for long-term, reliable performance.

Optics

- Selectable CCT 2200K, 3000K, or 4000K (Default setting), CRI>70.
- Type 2, Type 3, Type 4 and Type 5 distributions .
- External Half Glare shield is available.

Electrical

- Equipped with a 0-10V dimmable driver; however, the dimming wires are already occupied and cannot be used for external dimmer control.
- The Input voltage is AC120-347V (50/60Hz).
- All models are designed to withstand up to L/N-PE: 10kV, L-N: 10kV surge.
- Power factor (PF): >0.92

Finish

- Dark bronze color is standard. White, grey and black color are available.

Ambient temperature

- -22°F (-30°C) to 113°F (45°C)

Compliances

- cULus listed for wet locations.
- DLC 6.0 Premium Pending.

Warranty

- 5-year limited warranty.


PERFORMANCE DATA

Model	Watts	Lumen @5000K	CCT	Input Voltage
PQ-GL6-3CCTK-063TW-UNIV	63/53/33W	Max.9,135lm	2200/3000/4000K	120-347Vac 50/60Hz
PQ-GL6-3CCTK-125TW-UNIV	125/105/76W	Max.18,125lm	2200/3000/4000K	120-347Vac 50/60Hz





LED DECORATIVE POST TOP LIGHT

PQ-GL6


PHOTOMETRY




30

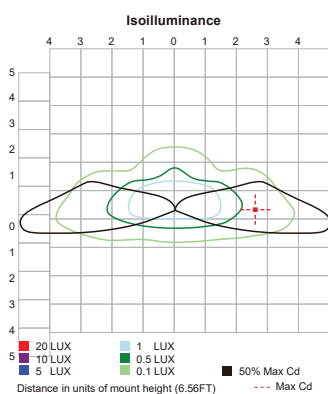


Type 2

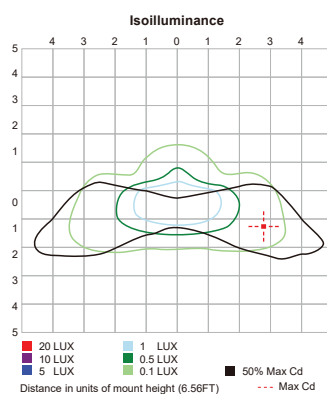

Type 3

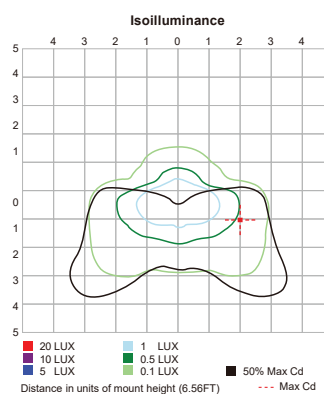

Type 4

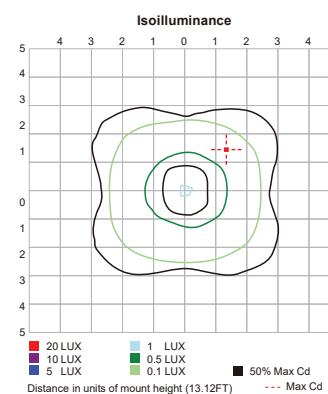

Type 5(Standard)

EPA (Pole Mount Arm & Post Top Mount)


*Data: Luminaire & integral mounting arm (0° tilt). Other tenons, arms, brackets or other accessories are not included in this EPA data.

Model	EPA(ft ²)						
	Pole Mount Arm for Round or Square Poles						Post Top Mount
	Single	2@90	2@180	3@90	3@120	4@90	Single
GL6	3.51	3.93	4.23	4.28	4.24	4.28	4.45

LED DECORATIVE POST TOP LIGHT

PQ-GL6

VERSATILE SELECTION CAPABILITY

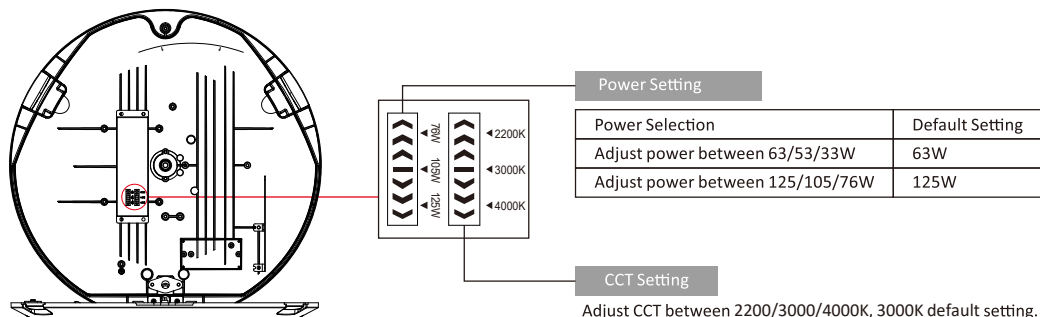

ACCESSORIES

Control Options

Factory-Installable / Field-Installable (purchased separately)




Sensor

Factory-Installable OR Field-Installable (purchased separately).




Field-Installable / Field-Use ONLY (purchased separately)

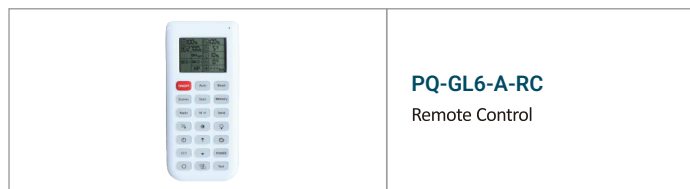

Glare Shield

Field-Installable / Field-Use ONLY (purchased separately)

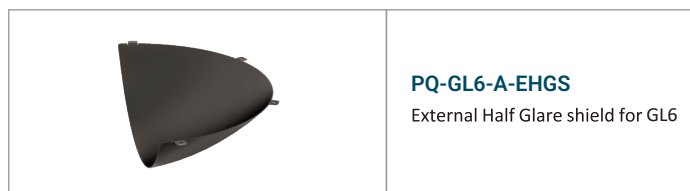




LED DECORATIVE POST TOP LIGHT

PQ-GL6

MOUNTING INFORMATION

Mounts and Brackets

May come with separate box with fixture (purchased separately).

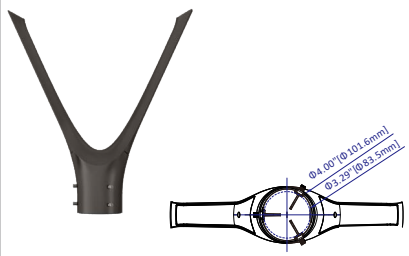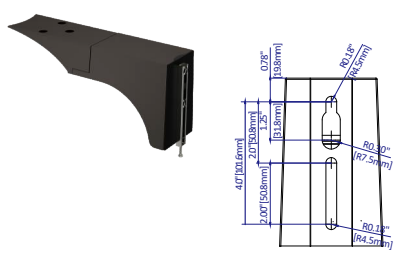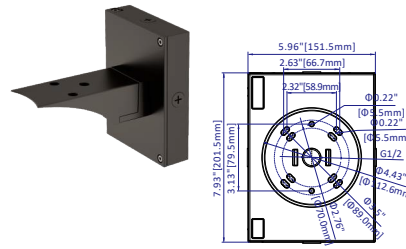	PT Post Top Mount for GL6 Dark Bronze, (Other customized colors are available.)		PA Pole Mount Arm for Round or Square Poles for GL6, Dark Bronze, (Other customized colors are available.)
			WM Wall Mount for GL6, Dark Bronze, (Other customized colors are available.)

ELECTRICAL DATA


Model Series	Wattage(W)	Current (A)					
		Input Voltage (V)					
		120	200	240	277	347	480
PQ-GL6-063TW	33	0.31	0.18	0.15	0.13	0.11	N.A.
	53	0.49	0.29	0.25	0.21	0.17	N.A.
	63	0.58	0.35	0.29	0.25	0.20	N.A.
PQ-GL6-125TW	76	0.70	0.42	0.35	0.30	0.24	0.18
	105	0.97	0.58	0.49	0.42	0.34	0.24
	125	1.16	0.69	0.58	0.50	0.40	0.29

LED DECORATIVE POST TOP LIGHT


PQ-GL6

DIMENSIONS

Post Top Mount

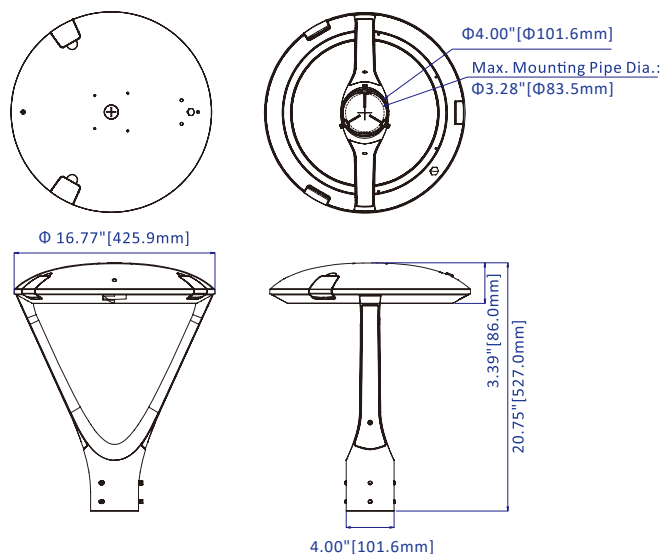

Pole Mount Arm for Round or Square Poles

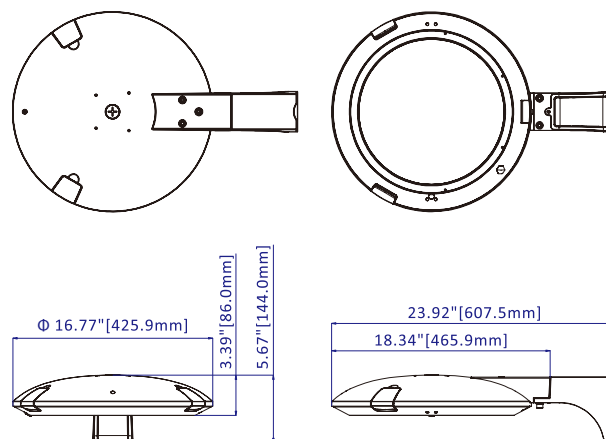

Wall Mount

