

8" Full Size LED Wraparound Fixture

PQ-LIWL4

- Designed for optimal general lighting in surface-mounted installations, it combines performance and flexibility.
- With field-adjustable functions, you can easily set the wattage and color temperature to match your needs.
- The integrated occupancy sensor provides bi-level control for enhanced energy efficiency and comfort.



4 color temperature options
and 4 power options



LED WRAPAROUND LIGHT

Model	Color Temperature (CCT)	Power (W)	Input Voltage (V)	Dimmable	Dimensions (in)
PQ-LIWL4	4CCTK = 3000/3500K/4000K/ 5000K	40TW =40/30/25/ 15	UNIV = 120-347V	D = 0-10V	L47.102IN x W8.149IN x H2.672IN

Catalog Number for Example: PQ-LIWL4-4CCTK-040TW-UNIV-120

CERTIFICATIONS




LED WRAPAROUND LIGHT

PQ-LIWL4

SPECIFICATIONS	
Power	40 / 30 / 25 / 15
Input voltage	120-347V
Lumens	5200/4000/3250/2000
Efficacy(lm/w)	130 -135
CRI	80
Color Temperature(CCT)	3000/3500K/4000K/5000K
Lifetime(hours)	50,000
Power Factor	0.99
Housing	Plastic
Mounting	Surface Mounted, Suspended Mounted
Certifications	cETL, DLC 5.1 Premium
Warranty	5 years

DIMENSIONS (UNIT: MM)

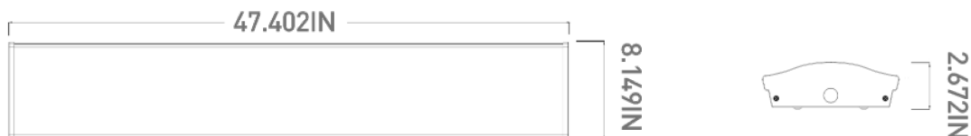

4FT: L47.102IN x W8.149IN x H2.672IN

MOTION SENSOR

LIWL-SENSOR



Dip Switch Motion Sensor