



L'ÉNERGIE sous un NOUVEAU JOUR
ENERGY in a NEW LIGHT



DOWNLIGHT

◀ PQ-DWLB8

➤ 8 inch downlight

The OKT 8inch LED Commercial Downlight are suitable for 100~347 VAC Input with fire-rated junction box, which delivers high lumens of exceptional 80+ CRI, Lifetime > 50000H with 3000K, 3500K, 4000K, 5000K ES color temperature options. They can replace most manufacturers incandescent, CFL or H.I.D. fixtures with apertures of 7.72" min. to 8.26" max diameter, Easy replacement and installation can be carried out without removing existing fixture.


PERFORMANCE SUMMARY

Model	PQ-DWLB8-18W	PQ-DWLB8-27W	PQ-DWLB8-40W	PQ-DWLB8-50W
Efficacy	82 lm/w	82 lm/w	78 lm/w	80 lm/w
Rated Power	18 W	27 W	40 W	50W
Delivered light output	3400 lm		4050 lm	
Input Voltage	100-347V AC			
CRI	Ra >80			
CCT Options	3000K, 3500K, 4000K, 5000K			
THD	<20%			
PF	>0.9			
Standard Warranty	5 Years			
Standard Lifetime	Designed minimum 50,000 hours			
Mounting	Recessed, Retrofit			
Recommended Dimmers	DIVA-DVTV(LUTRON), NOVA T NTSTV-DV(LUTRON)			
Signal Current	<2mA			
Driver Efficiency	>87%			
Temperature Rating	Designed to operate in temperature 45°C and below room side and plenum side.			
UL Listed	YES			
Energy Star Listed	YES			
LM79 Report	YES			
Damp Rated	YES			

100-347Vac
Dimming 0-10V



Dimension

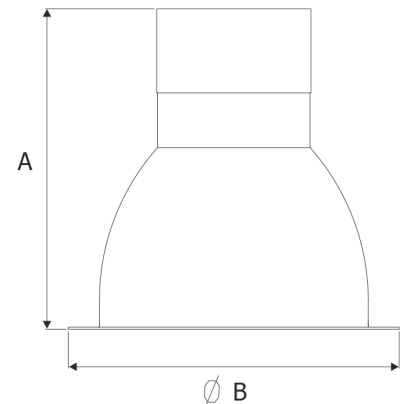

Item No.	A	B
PQ-DWLB8-XXK-18W	8.20"	9.29"
PQ-DWLB8-XXK-27W	8.20"	9.29"
PQ-DWLB8-XXK-40W	8.20"	9.29"
PQ-DWLB8-XXK-50W	8.97"	9.29"

