

OVERHEAD CRANE LIGHT

PQ-TPS

Built with heavy-duty die-cast aluminum to withstand the toughest environments, the overhead crane warning LED projects a solid blue or red tightly focused spotlight on the floor to alert pedestrians to the hook's location. In addition, the spotlight aids precise positioning for crane operators by providing a framing reference between the floor and hook.



LISTINGS




ACCESSORY




AC/DC Power Supply to power 1 light
Output: 24V DC / 150W
Input: 100-305V AC

DIMENSIONS 72W / 120W

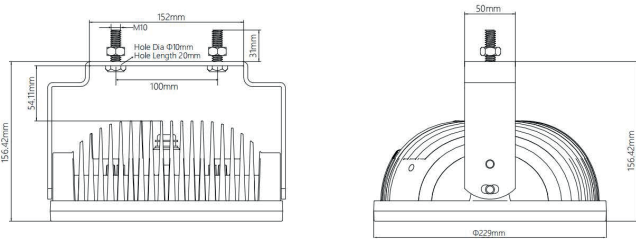

DIMENSIONS 140W

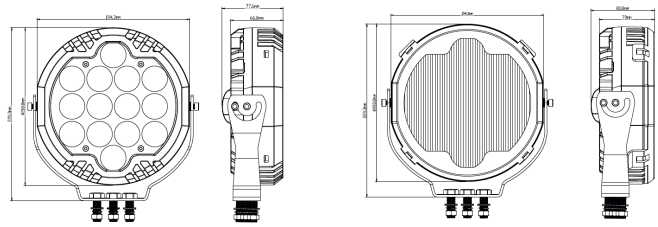

SPECIFICATIONS

Color	Red/Blue	Certification	ISO, CE, RoHS, cUL
Lifetime	50000 hrs	IP rating	IP67

MODEL	POWER (W)	INPUT VOLTAGE	SIZE	LEDS	LUMENS	DIMENSIONS OF LIGHT
PQ-TPS-RED/BLUE-72W	72	9-48VDC	9"	24 pcs x 3W CREE LEDs	8400 lm	229 x 98 x 234 mm
PQ-TPS-RED/BLUE-120W	120	9-48VDC	9"	24 pcs x 5W CREE LEDs	10000 lm	229 x 98 x 234 mm
PQ-TPS-RED/BLUE-140W	140	9-32VDC	7"	14 pcs x 10W CREE LEDs	14000 lm	194.3 x 77.6 x 220.3 mm

EXAMPLE: MPQ-TPS-RED-140W-120V

OVERHEAD CRANE LIGHT

PQ-TPS



SPOT BEAM

Vertical Dimensions (m)	Diameter (m)
5	0.65
10	1.2



LINEAR BEAM

Installation Height (m)	Length (m)	Width (m)
5	4.2	0.65
10	9.6	1.2
15	15	1.5